
YOUR FAMILY / YOUR PLAN / YOUR HOME

The interior of your everyday.

Eleven indoor spaces. A warm ivory, pale oak and soft stone palette. Room plans, furniture reservations, material and lighting intent, and the decisions still to settle.

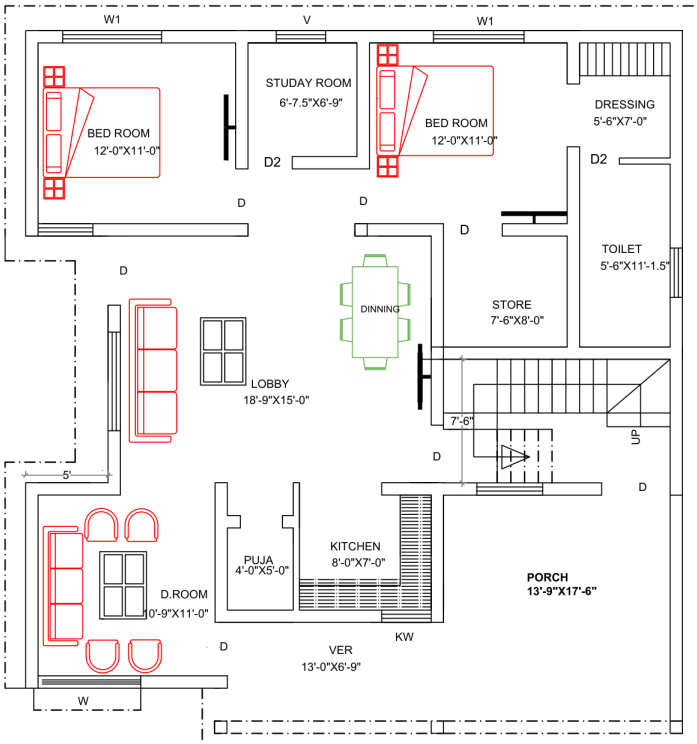


Source: BANSI VERMA_010920.pdf · page 1. Parents and two babies in the family bedroom; grandparents in the other bedroom. Kitchen, puja and bathroom access retained.

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

01 / Living & dining

18′9″ × 15′ · printed PDF label · diagram dimensions are the scaled PDF footprint

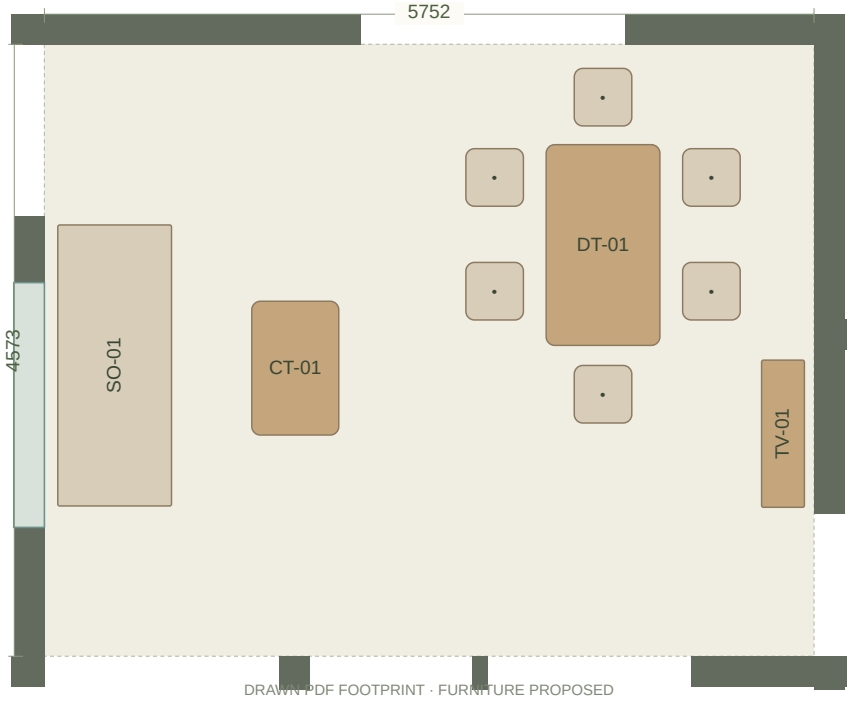

Layout & finishes

Ivory walls, light stone floor, oak furniture and sage textiles.

- 2100 mm sofa along the NE-side inner wall.
- 1500 × 850 mm dining table for four to six; confirm occupied-chair clearances.
- Low TV console at stair-side wall; keep the route to every room open.

Light & services

3000 K ambient and dining pendant on separate dimmers.

No AC requested here. Provide fan points with locations and quantities coordinated to room geometry, pendant lights and dining/seating. Preserve TV/data conduits and seating-area sockets.


Finish codes: P01 · P02 · F01 · J01 · T01

D03 / Living width needs checking

The label says 18 feet 9 inches (5715 mm); the inner wall faces scale to about 5752 mm. Reconcile this roughly 37 mm difference before flooring or joinery quantities.

02 / Drawing room

10′9″ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

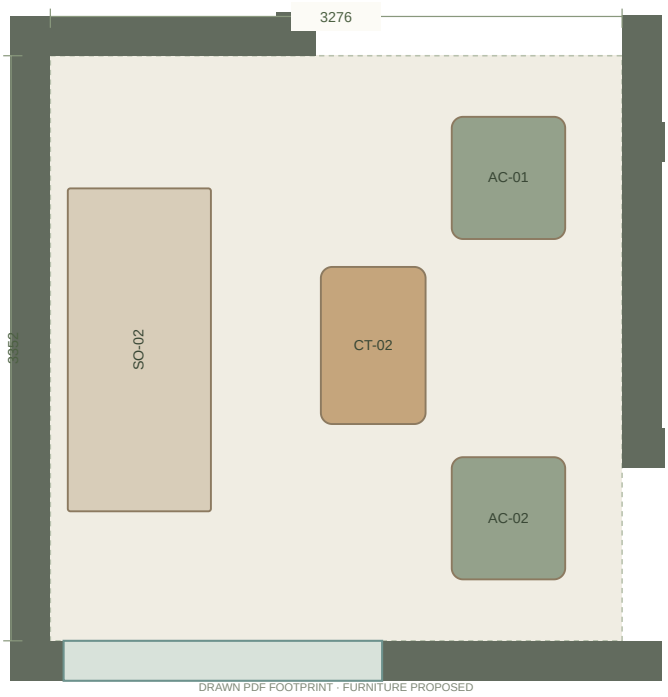

Layout & finishes

Ivory walls, oatmeal sofa, light oak and one sage chair.

- Compact 1800–2100 mm sofa, two occasional seats if clearances permit.
- Rounded coffee table and low console; avoid bulky corner sofas.
- Sheer plus blackout curtains at the SE front window.

Light & services

3000 K layered light; one floor lamp rather than a heavy false ceiling.


No AC requested here. Provide a ceiling fan point, general sockets and TV/data provision if needed; keep fan sweep clear of lights and curtains.

Finish codes: P01 · P02 · F01 · J01 · T01 · T02

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

03 / Kitchen

8′ × 7′ · printed PDF label · diagram dimensions are the scaled PDF footprint

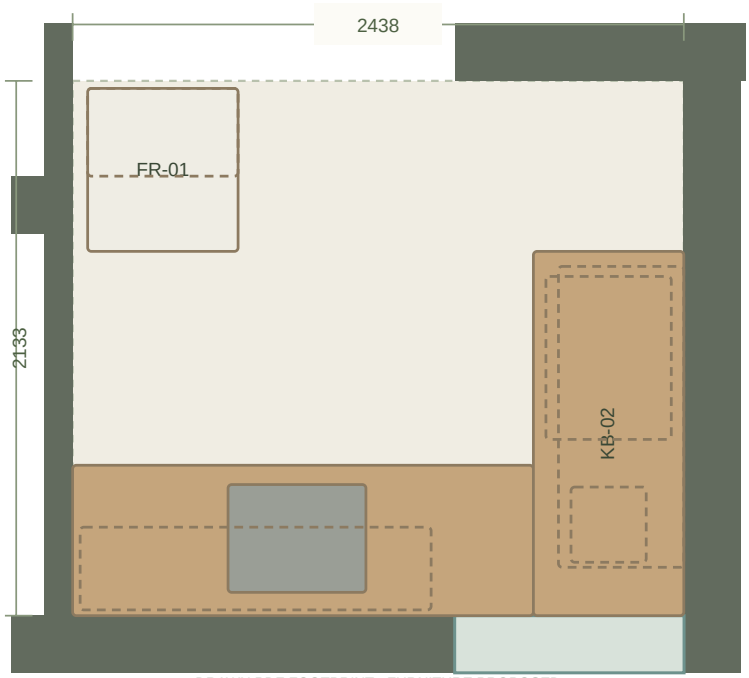

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Ivory wall-cabinet front, pale oak base fronts and a light stone worktop.

- L-shaped 600 mm-deep counters for one main cook; no island.
- A fixed three-burner gas hob and a separate fixed single-zone induction unit on the right counter; sink on the front counter. The two product reservations have 190 mm between them, subject to manufacturer approval.
- A 600 × 650 mm refrigerator reservation at the left of the entrance leaves about 1178 mm to the opposite counter; door opening, ventilation and appliance cut-outs remain to be checked.
- A 1400 mm ivory upper-cabinet run on the solid front wall, with a proposed 650 mm gap above the 900 mm worktop; it stops before KW.

Light & services

4000 K under-cabinet task strips plus a ceiling light.


For one main cook, with BOTH cooking units fixed in the counter: three gas burners and one induction zone. Coordinate gas supply/isolation, induction circuit and ventilation beneath the unit, sink/waste, filtered water, fridge and externally ducted extraction. Circuit ratings, duct size and gas route require chosen product instructions. Place accessible isolation outside hot/wet zones; do not discharge the hood into another room.

Finish codes: P01 · F01 · J02 · S01 · M01 · J01 · C01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

04 / Puja

4′ × 5′ · printed PDF label · diagram dimensions are the scaled PDF footprint

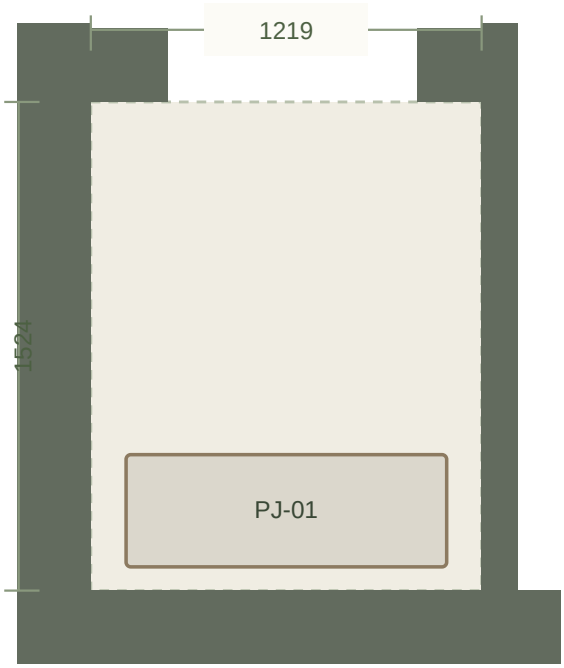

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Warm ivory, a light stone altar and an oak shelf.

- Shallow altar shelf against back wall, with closed lower storage.
- Keep the opening and floor clear for seated use.
- Use a heat-safe tray and ventilation if using a flame.

Light & services

2700–3000 K concealed light with accessible driver.


One protected light circuit; no loose wiring beside lamps or incense.

Finish codes: P01 · P02 · F01 · J01 · S01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

05 / Family bedroom

12′ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

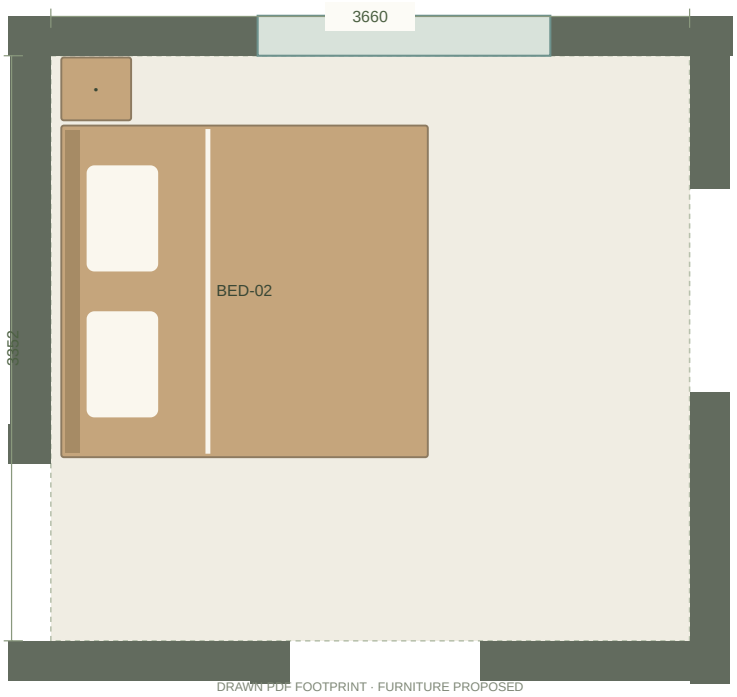

Layout & finishes

Warm ivory, pale oak and a textured stone-colour headboard.

- 6-foot-wide parent bed confirmed. A proposed 1900 × 2100 mm overall frame allowance retains the PDF headboard direction; choose the actual frame and mattress before ordering.
- Two separate baby cots are included in the item list, but their positions are held for a measured fit check. The previous side-wall placement obstructed the dressing route.
- The larger frame is shifted toward the rear, clear of the original family-entry span. Approximately 1052 mm remains to the lower room face and 1500 mm at its foot. These geometric gaps are not approved circulation clearances. Resolve both cot positions and dressing/store access before bedroom fit-out.

Light & services

3000 K dimmable light; low-level night light toward bathroom.

AC confirmed for the parents' and babies' bedroom. Choose unit position and adjustable airflow to avoid direct draughts at both cots. Coordinate a dedicated circuit, outdoor heat rejection and condensate drainage; type and load-based capacity remain pending.


Finish codes: P01 · P02 · F01 · J01 · T01

F01 / Two-cot layout is still a fit study

The room also carries the dressing and store routes. Cot footprints are reservation blocks, not approved products. Rear-window separation, curtain cords, door swings and caregiver access must be resolved before either cot position is approved.

06 / Grandparents' bedroom

12′ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

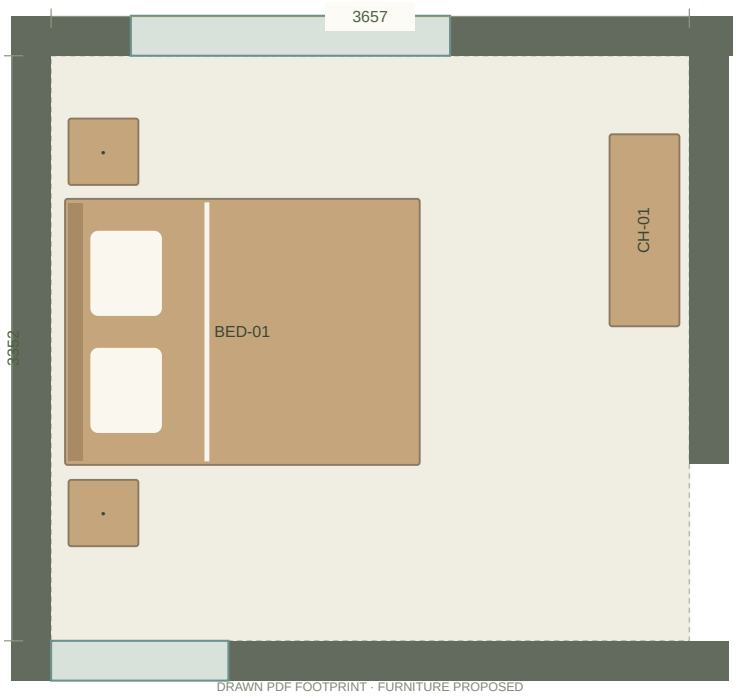

Layout & finishes

Warm ivory walls, a soft sage headboard and pale oak bedside tables.

- 1524 × 2032 mm bed proposal, retaining the west-side headboard direction shown in the PDF.
- Two compact bedside tables; no loose rug on the night route.
- A shallow chest for daily clothing. Full hanging storage is in the shared dressing area; wardrobe allocation is still to be agreed.

Light & services


3000 K dimmable ceiling light; reading lamps with separate switches.

AC confirmed for this bedroom: dedicated circuit and protection sized by the electrician; equipment type and capacity pending. Coordinate power, outdoor heat rejection and condensate drainage before plaster. Keep bedside sockets and switches convenient.

Finish codes: P01 · P02 · F01 · J01 · T02

07 / Dressing

5′6″ × 7′ · printed PDF label · diagram dimensions are the scaled PDF footprint

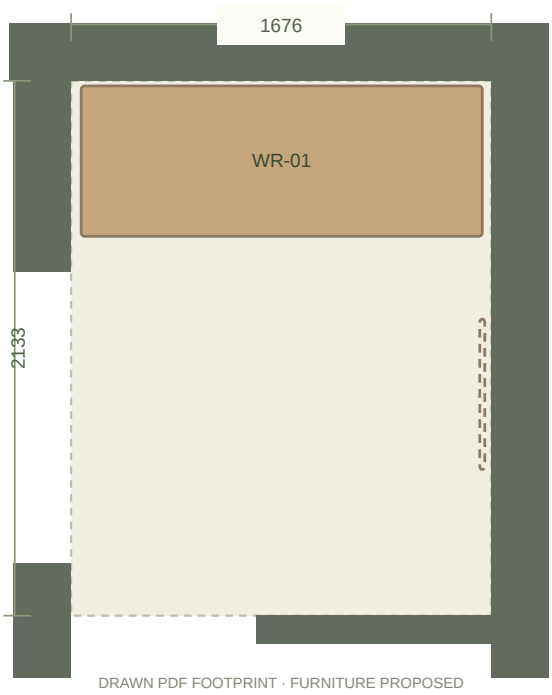

Layout & finishes

Ivory cabinet fronts, light oak handles and a full-height mirror.

- One 600 mm-deep wardrobe run against the rear wall, where storage hatching appears in the PDF.
- Clear central route from the family bedroom to the bathroom; do not place cabinets beside both doorways.
- Sliding fronts proposed; internal hanging, drawer and loft allocation still to be agreed.

Light & services

3500–4000 K vertical mirror light, CRI 90 or higher.


One grooming socket outside wet zone; ventilate enclosed cupboards.

Finish codes: P01 · P02 · F01 · J01 · M01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

08 / Bathroom

5′6″ × 11′1½″ · printed PDF label · diagram dimensions are the scaled PDF footprint

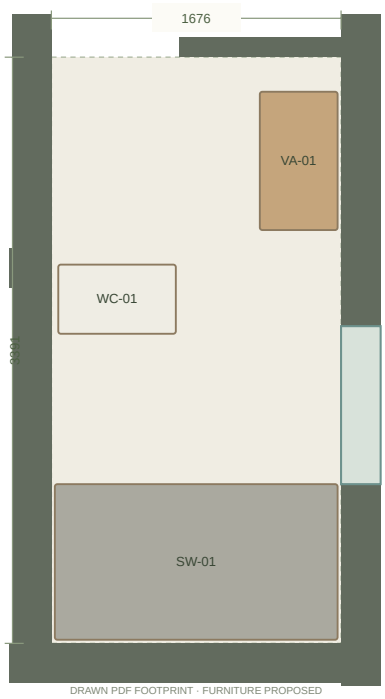

Layout & finishes

Warm stone slip-resistant tile, ivory ceiling and brushed stainless fittings.

- 800 × 450 mm vanity near the dressing entry, WC in the middle and a 900 mm-deep shower zone at the far end.
- Wet/dry division is proposed; screen opening, drain, waterproofing build-up and fixture clearances need a coordinated bathroom drawing.
- Bathroom access remains exactly via the dressing area; no new common doorway is introduced.

Light & services

4000 K mirror task lighting; wet-area rated fixtures chosen by installer.


Provide bathroom exhaust to a confirmed outdoor discharge point, with a roof route considered if the side gap is obstructed; do not exhaust into an enclosed gap or another room. Coordinate duct, geyser circuit, earthing and wet-area fittings before construction. Electric geyser confirmed by owner; capacity, location, nameplate load, mounting support, relief discharge and accessible service arrangements remain to be coordinated.

Finish codes: P02 · F02 · J02 · S01 · M01 · J01 · C01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

09 / Study

6′7½″ × 6′9″ · printed PDF label · diagram dimensions are the scaled PDF footprint

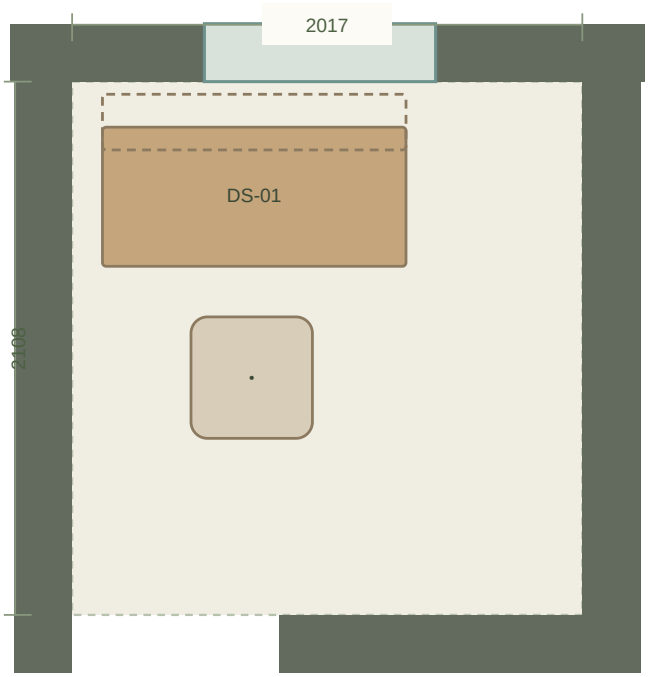

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Ivory, light oak desk and a small sage pinboard.

- 1200 × 550 mm desk with one chair and a shallow shelf.
- Keep the D2 entry clear. The PDF labels the rear opening V; a full-height picture window is not assumed.
- The printed depth differs from the vector drawing by about 50 mm; check before desk fabrication.

Light & services

4000 K desk light, 3000 K ambient; control glare on screens.

Desk sockets, data conduit and router route before plaster.


Finish codes: P01 · P02 · F01 · J01 · T01

D02 / Study depth needs checking

The label says 6 feet 9 inches (2057 mm); the vector depth is about 2108 mm. Verify the roughly 50 mm difference at the shell.

10 / Store

7′6″ × 8′ · printed PDF label · diagram dimensions are the scaled PDF footprint

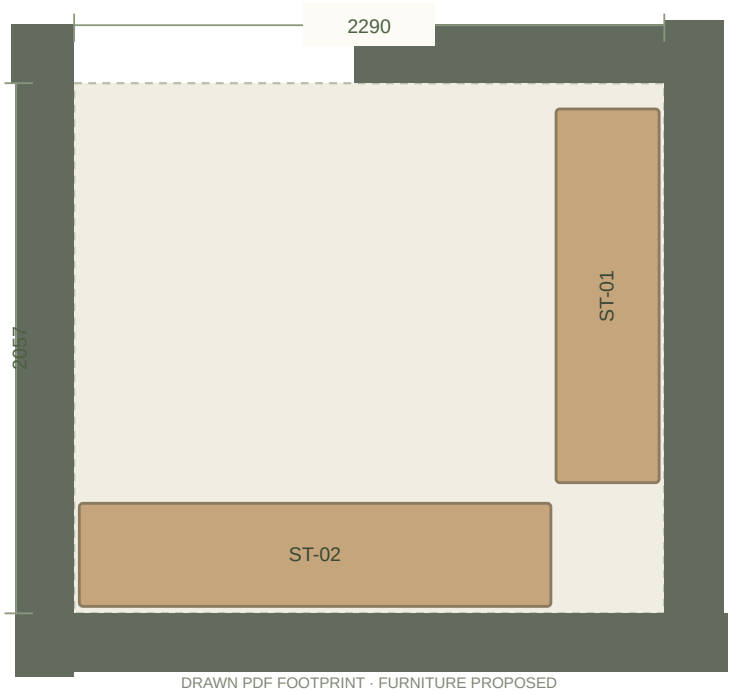

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Washable ivory walls and modular oak-tone shelving.

- Two 400 mm-deep shelf runs proposed along the side and rear.
- Use the smaller drawn depth for this fit study, keeping the doorway open.
- The 8-foot label disagrees with the drawn 6-foot-9-inch depth. No shelf order until the architect resolves it.

Light & services

3500–4000 K bright ceiling light.

One general socket and provision for future utility needs after plumbing review.


Finish codes: P01 · P02 · F01 · J01

D01 / Store depth does not agree

The PDF label says 8 feet (2438 mm). Its vector wall faces scale to about 2057 mm (6 feet 9 inches): a difference of about 381 mm. The model follows the drawn walls; obtain architect confirmation before shelves are ordered.

11 / Staircase

7′6″ dimension shown; not a tread or rise schedule · printed PDF label · diagram dimensions are the scaled PDF footprint

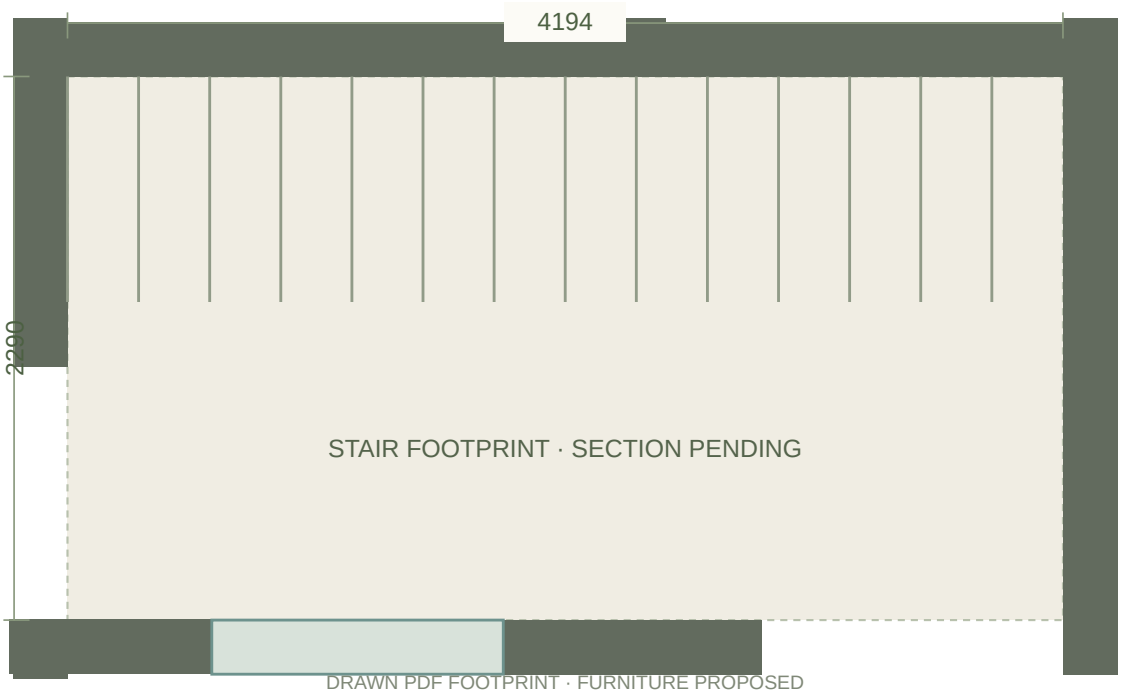

Layout & finishes

Pale stone treads, contrasting nosings and a simple metal handrail.

- The PDF stair footprint is retained. The model leaves the flight as a plan outline because floor height and risers are not supplied.
- Provide a continuous handrail, slip-resistant treads and low-level lighting after the architect fixes the stair section.
- Future upper floor stays in the brief; no new outdoor staircase or entrance is added.

Light & services

Low-level step lighting and two-way switching.

Foundation/plinth designed by an engineer for a future floor, as confirmed by user. Coordinate the existing structural drawings, stair geometry, headroom, future entry and service risers before continuing construction.

Finish codes: P01 · P02 · F01 · J01

The material schedule

Code / material	Application	Specification to approve
P01 / Warm ivory	Main interior walls	Low-sheen washable paint; approve an actual sample on a dry, prepared wall.
P02 / Chalk white	Ceilings	Matt ceiling finish. Plain ceiling is the default; no invented beam concealment.
F01 / Soft stone	Dry-area floors	Matte porcelain proposal. Select slip performance, module and grout from samples; no quantity until the shell is checked.
F02 / Wet-area stone	Bathroom floor	Wet slip performance and drain slopes to be specified as a system. Colour alone does not establish safety.
J01 / Pale oak	Dry joinery	Oak-tone laminate or veneer proposal. Confirm core grade, emissions, edges, hardware and warranty.
J02 / Ivory wet-zone joinery	Kitchen + vanity	Moisture-appropriate documented board grade, sealed cuts, raised or protected base and service access. Approve supplier specification.
S01 / Light mineral surface	Counter + altar	Light stone family; choose the actual surface after stain, heat and cleaning demonstrations. No brand or performance assumed.
T01 / Oatmeal textile	Sofas + headboards	Removable washable or documented easy-clean upholstery, tested on a physical sample.
T02 / Muted sage	Limited textile accents	Small accents keep the palette light. Match in daylight and under the selected lamps.
M01 / Brushed metal	Fittings + mirror details	Consistent finish with documented wet-area suitability where needed.
C01 / Soft white	Appliances + sanitaryware	Appliance and fixture sizes remain product reservations, not endorsed selections.

Lighting intent

Code / purpose	Temperature	Before sign-off
L01 / Soft general light	3000 K	Point locations proposed; output and count need calculation
L02 / Dining pendant	3000 K	Height and glare to be checked with table and users
L03 / Clear task / storage light	3500–4000 K	CRI 90+ proposed for mirror and colour-critical tasks
L04 / Desk / counter task light	4000 K	Avoid glare and shadows; no lux performance claim
L05 / Altar accent	2700–3000 K	Keep fixtures clear of heat and flame
L06 / Low night light	2700 K	Trial brightness; avoid direct view from beds
L07 / Wet-area light	4000 K	Installer to select zone-appropriate ingress protection

The cost & decision plan

Indicative interior allowance: ₹16.96 lakh – ₹29.79 lakh, including 15% contingency. All purchases are new. These are unquoted planning allowances, not a supplier offer.

Category	Planning range	Basis
Floor finishes & skirting	₹1.50 lakh–₹2.50 lakh	Measured tiled area, substrate and labour
Painting & surface preparation	₹0.70 lakh–₹1.30 lakh	Wall/ceiling areas, product and number of coats
Kitchen cabinets, worktop & sink	₹2.00 lakh–₹3.50 lakh	Final cabinet lengths and hardware
Wardrobe, vanity & storage	₹1.40 lakh–₹2.50 lakh	One-sided dressing storage and utility shelves
Beds, mattresses, seating & dining	₹2.20 lakh–₹3.80 lakh	All new: two beds and mattresses, two sofas, six-seat dining, study furniture and compact bedside storage; exact products pending
Electrical fit-out, fans & lights	₹1.50 lakh–₹2.60 lakh	Point schedule, DB, protection and wiring
Bathroom & plumbing fit-out	₹1.40 lakh–₹2.50 lakh	Fixtures, geyser, waterproofing and service labour
Appliances & cooling	₹2.20 lakh–₹3.70 lakh	All new: fridge, separate built-in three-burner gas hob and single-zone induction unit, extractor, washing machine, TV and TWO bedroom AC units. Unquoted planning allowance; selected products, ductwork, installation and capacities may change it. No reuse credit.
Curtains & soft furnishings	₹0.60 lakh–₹1.10 lakh	Measured windows, fabrics and tracks
Interior doors & hardware	₹1.00 lakh–₹1.80 lakh	Final opening count and sizes
Two baby cots & safe mattresses	₹0.25 lakh–₹0.60 lakh	Two new compliant cots and compatible infant mattresses; exact product dimensions pending, not fabricated from the model

Shell construction, roof, structural work, exterior openings, design fees and statutory approvals are excluded. Obtain a separate civil BOQ; only the plinth exists.

Before design sign-off

- Resolve the store, study and living-room label-versus-drawing discrepancies with the architect.
- Choose the actual 6-foot parent-bed frame and both cot products; demonstrate a safe arrangement with dressing and store routes clear.
- Choose actual three-burner gas and single-zone induction models (both fixed), extractor, fridge size, oven/microwave needs and washing-machine location.
- Confirm how clothing and linen storage will be split between the two families.
- Confirm ceiling, window sill/head and door details from architectural elevations; no heights are supplied in this PDF.
- Obtain itemised Jammu quotations, including labour, taxes, delivery, installation and warranty.

Original source SHA-256:
2c22e21673e9bd704036734eb310a27f706488516e390dbe4e8248f21b1d5fd3

Furniture CSV, full room sheets and research sources: Open the review website.