DESIGN DEVELOPMENT / DD–04

A design to coordinate.
A clear path to construction.

This package records the proposed interior design from the supplied PDF. It is for the owner, architect and installers to resolve together. It is not a construction, electrical, plumbing or fabrication release.

Architectural basis

Only BANSI VERMA_010920.pdf is available. The owner confirms the plinth matches this PDF. There is no measured site record or supplied structural/level/service set.

32 PDF wall footprints are retained. Three dimension conflicts remain: store depth, study depth and living width. Door swings and vertical dimensions are not supplied.

Confirmed kitchen brief

One cook. Fixed three-burner gas hob using an LPG cylinder, plus a separate fixed single-zone induction unit. Exact products and their installation manuals are pending.

Before site work

1. Architect checks the shell, levels, openings and conflicts.
2. Specialists coordinate structure, electrical, plumbing, gas, extraction and AC.
3. Owner approves actual products and physical finish samples.
4. Suppliers submit measured quantities, rates and shop drawings.
5. Responsible professionals issue the checked construction revision.

All numerical values are rounded PDF-derived dimensions or marked design proposals. Do not scale or fabricate from these sheets. No signature or construction approval is implied.

Drawing register

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION


Sheet	Drawing	Purpose	Construction release
A-101	Living & dining / furniture layout	Coordination	NOT RELEASED
A-102	Drawing room / furniture layout	Coordination	NOT RELEASED
A-103	Kitchen / furniture layout	Coordination	NOT RELEASED
A-104	Puja / furniture layout	Coordination	NOT RELEASED
A-105	Family bedroom / furniture layout	Coordination	NOT RELEASED
A-106	Grandparents' bedroom / furniture layout	Coordination	NOT RELEASED
A-107	Dressing / furniture layout	Coordination	NOT RELEASED
A-108	Bathroom / furniture layout	Coordination	NOT RELEASED
A-109	Study / furniture layout	Coordination	NOT RELEASED
A-110	Store / furniture layout	Coordination	NOT RELEASED
A-111	Staircase / furniture layout	Coordination	NOT RELEASED
L-201	Living & dining / lighting intent	Intent only	NOT RELEASED
L-202	Drawing room / lighting intent	Intent only	NOT RELEASED
L-203	Kitchen / lighting intent	Intent only	NOT RELEASED
L-204	Puja / lighting intent	Intent only	NOT RELEASED
L-205	Family bedroom / lighting intent	Intent only	NOT RELEASED
L-206	Grandparents' bedroom / lighting intent	Intent only	NOT RELEASED
L-207	Dressing / lighting intent	Intent only	NOT RELEASED
L-208	Bathroom / lighting intent	Intent only	NOT RELEASED
L-209	Study / lighting intent	Intent only	NOT RELEASED
L-210	Store / lighting intent	Intent only	NOT RELEASED
L-211	Staircase / lighting intent	Intent only	NOT RELEASED
J-301	Kitchen / counter elevations	Envelope only	NOT RELEASED
J-302	Dressing / wardrobe envelope	Envelope only	NOT RELEASED
J-303	Bathroom / vanity envelope	Envelope only	NOT RELEASED

Schedules and request sheets follow the room drawings. Required working documents: architectural, structural, electrical, plumbing, mechanical, joinery and measured cost schedules.

Living & dining / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

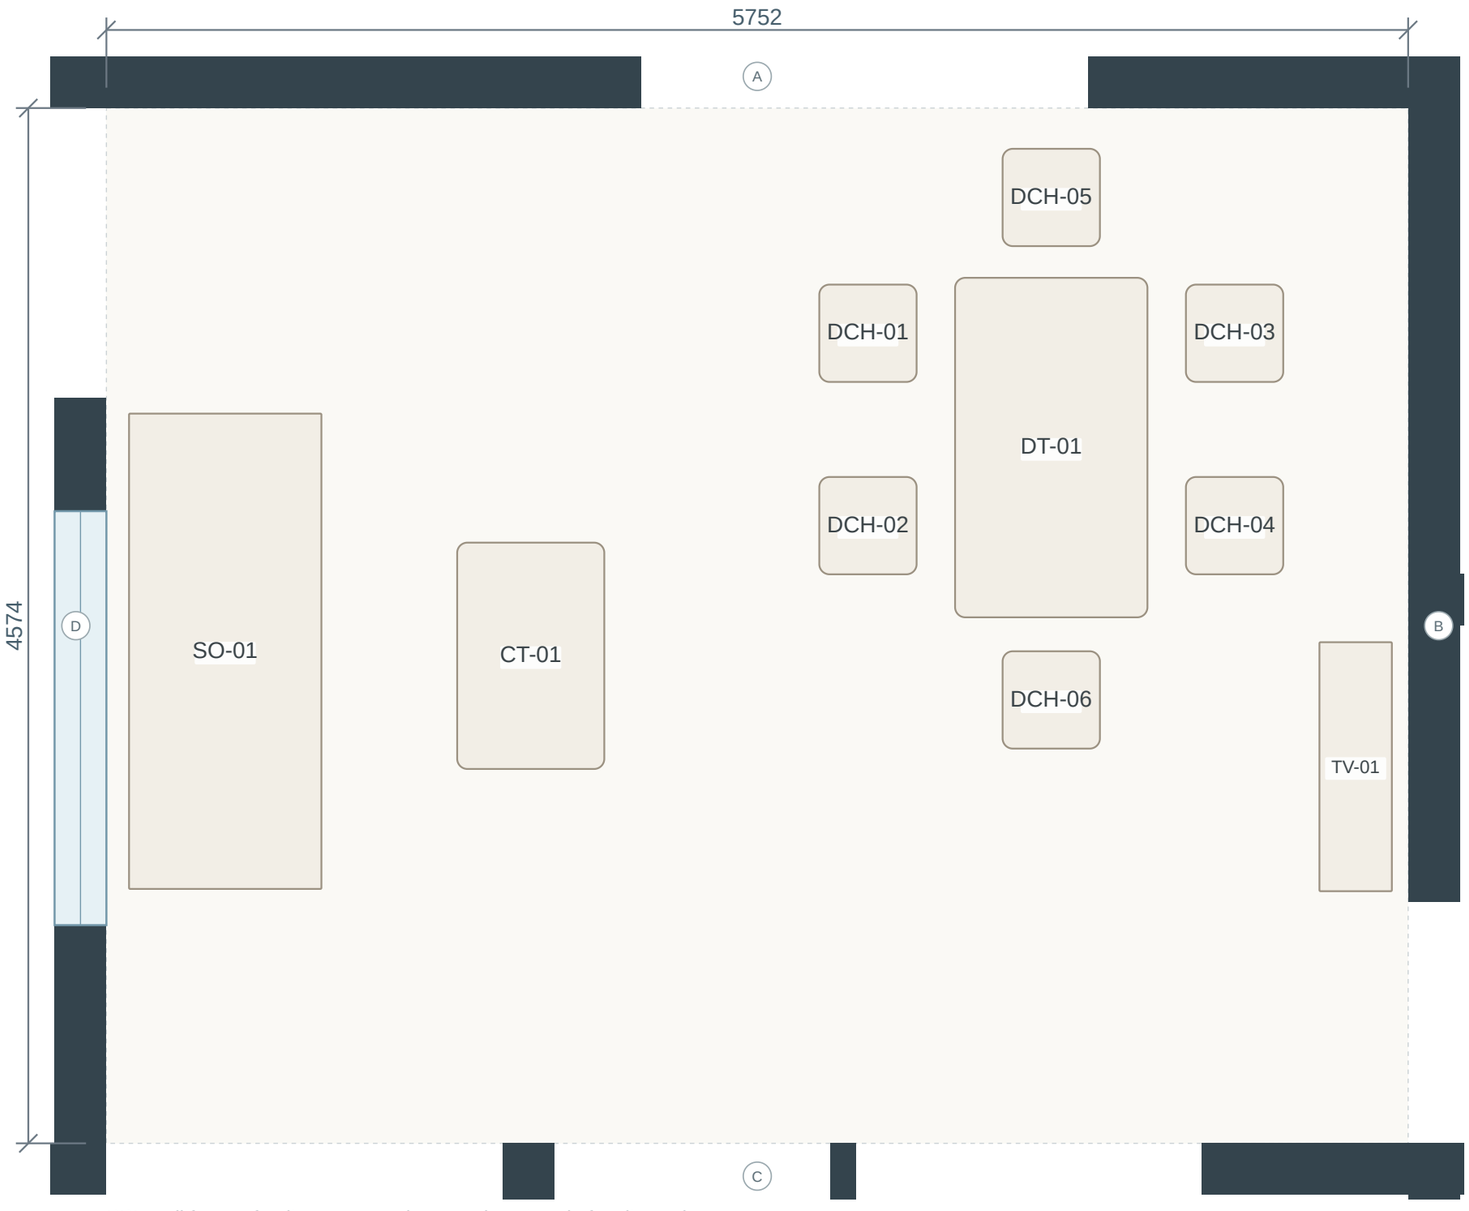

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Living & dining

Printed PDF label: 18′9″ × 15′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
SO-01	Family sofa	850 × 2100 × 800	1
CT-01	Rounded coffee table	650 × 1000 × 400	1
TV-01	TV console	320 × 1100 × 450	1
DT-01	Six-seat dining table	850 × 1500 × 750	1
DCH-01	Dining chair	430 × 430 × 820	1
DCH-02	Dining chair	430 × 430 × 820	1
DCH-03	Dining chair	430 × 430 × 820	1
DCH-04	Dining chair	430 × 430 × 820	1
DCH-05	Dining chair	430 × 430 × 820	1
DCH-06	Dining chair	430 × 430 × 820	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

2100 mm sofa along the NE-side inner wall. 1500 × 850 mm dining table for four to six; confirm occupied-chair clearances. Low TV console at stair-side wall; keep the route to every room open.

Open dependencies

D03: Resolve the living-room width conflict


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Living & dining / furniture layout**	**DD–04 / 12 OCT 2026**	**A-101 / mm · NTS**

Drawing room / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

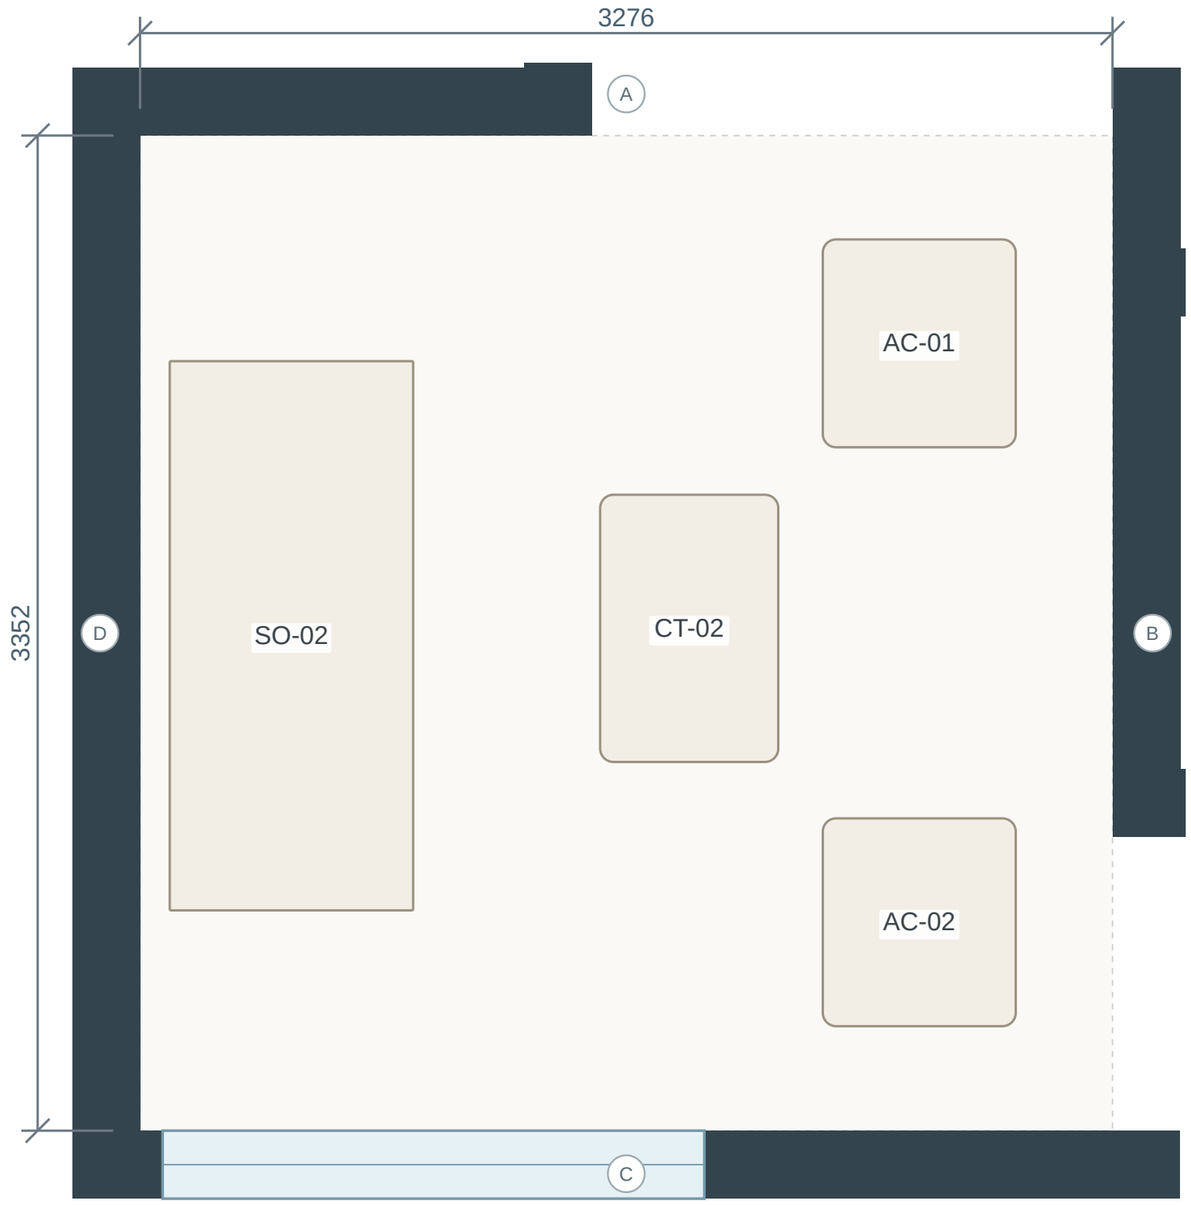

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Drawing room

Printed PDF label: 10′9″ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
SO-02	Guest sofa	820 × 1850 × 800	1
CT-02	Coffee table	600 × 900 × 400	1
AC-01	Occasional chair	650 × 700 × 820	1
AC-02	Occasional chair	650 × 700 × 820	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

Compact 1800–2100 mm sofa, two occasional seats if clearances permit. Rounded coffee table and low console; avoid bulky corner sofas. Sheer plus blackout curtains at the SE front window.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Drawing room / furniture layout**	**DD–04 / 12 OCT 2026**	**A-102 / mm · NTS**

Kitchen / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

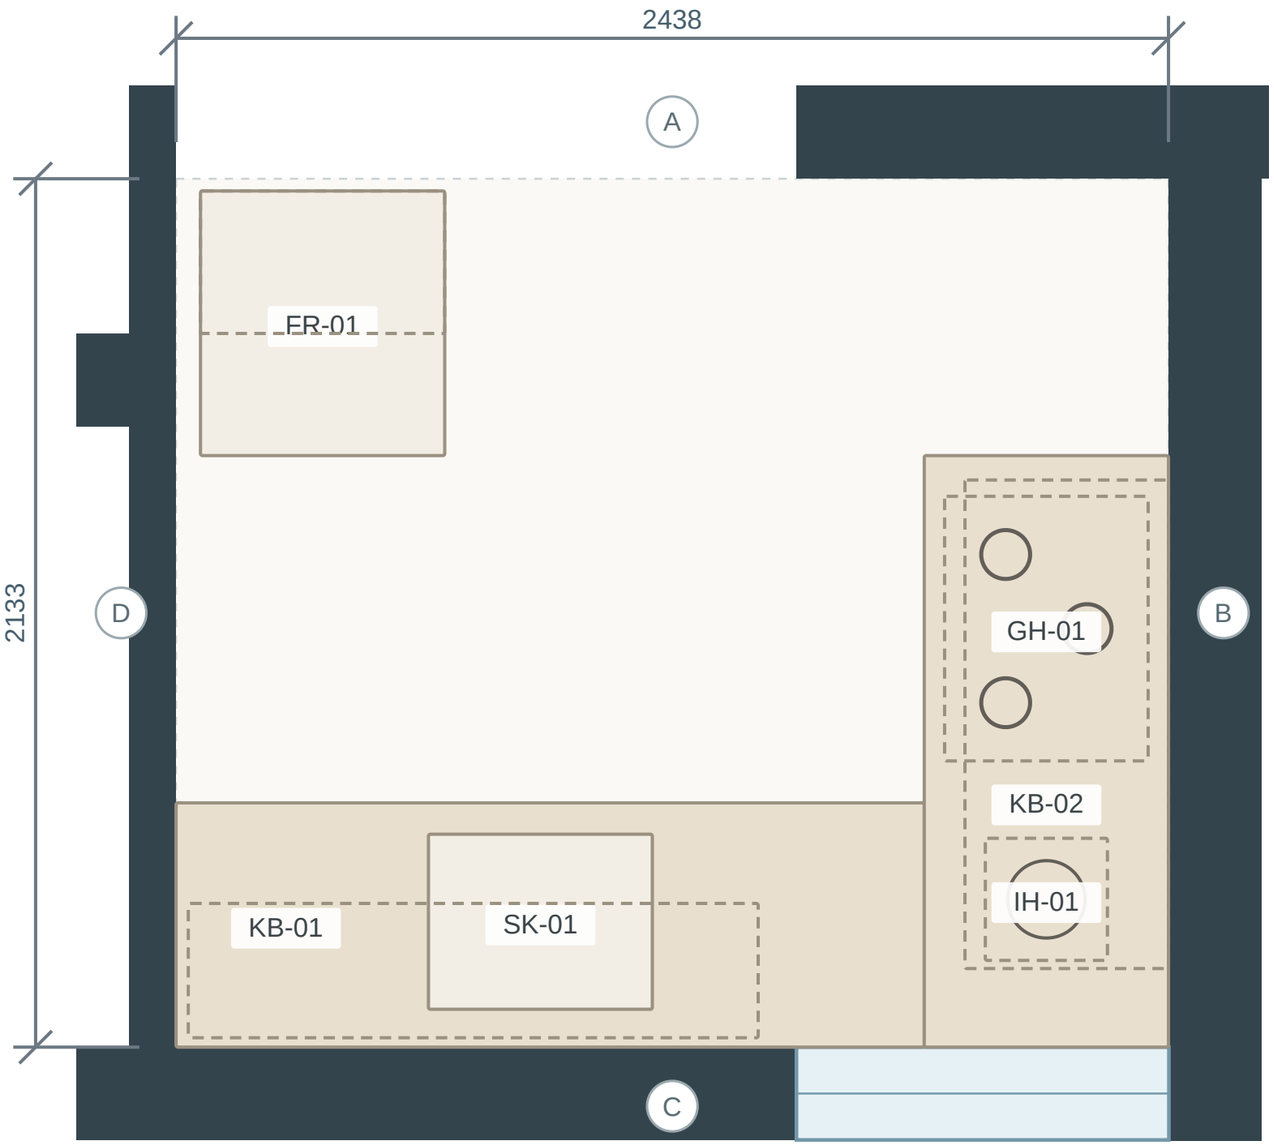

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Kitchen

Printed PDF label: 8′ × 7′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
KB-01	Front base-cabinet run	1838 × 600 × 900	1
KB-02	Right base-cabinet run	600 × 1453 × 900	1
FR-01	Refrigerator reservation	600 × 650 × 1800	1
SK-01	Sink reservation	550 × 430 × 200	1
KU-01	Above-fridge cabinet	600 × 350 × 600	1
KU-02	Front upper-cabinet run	1400 × 330 × 750	1
GH-01	Fixed three-burner gas hob reservation	500 × 650 × 85	1
IH-01	Fixed single-zone induction reservation	300 × 300 × 15	1
EX-01	Cooking-run extractor reservation	500 × 1200 × 1150	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

L-shaped 600 mm-deep counters for one main cook; no island. A fixed three-burner gas hob and a separate fixed single-zone induction unit on the right counter; sink on the front counter. The two product reservations have 190 mm between them, subject to manufacturer approval. A 600 × 650 mm refrigerator reservation at the left of the entrance leaves about 1178 mm to the opposite counter; door opening, ventilation and appliance cut-outs remain to be checked. A 1400 mm ivory upper-cabinet run on the solid front wall, with a proposed 650 mm gap above the 900 mm worktop; it stops before KW.

Open dependencies

K01: Select both fixed cooking appliances

K02: Coordinate gas and external extraction


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Kitchen / furniture layout**	**DD–04 / 12 OCT 2026**	**A-103 / mm · NTS**

Puja / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

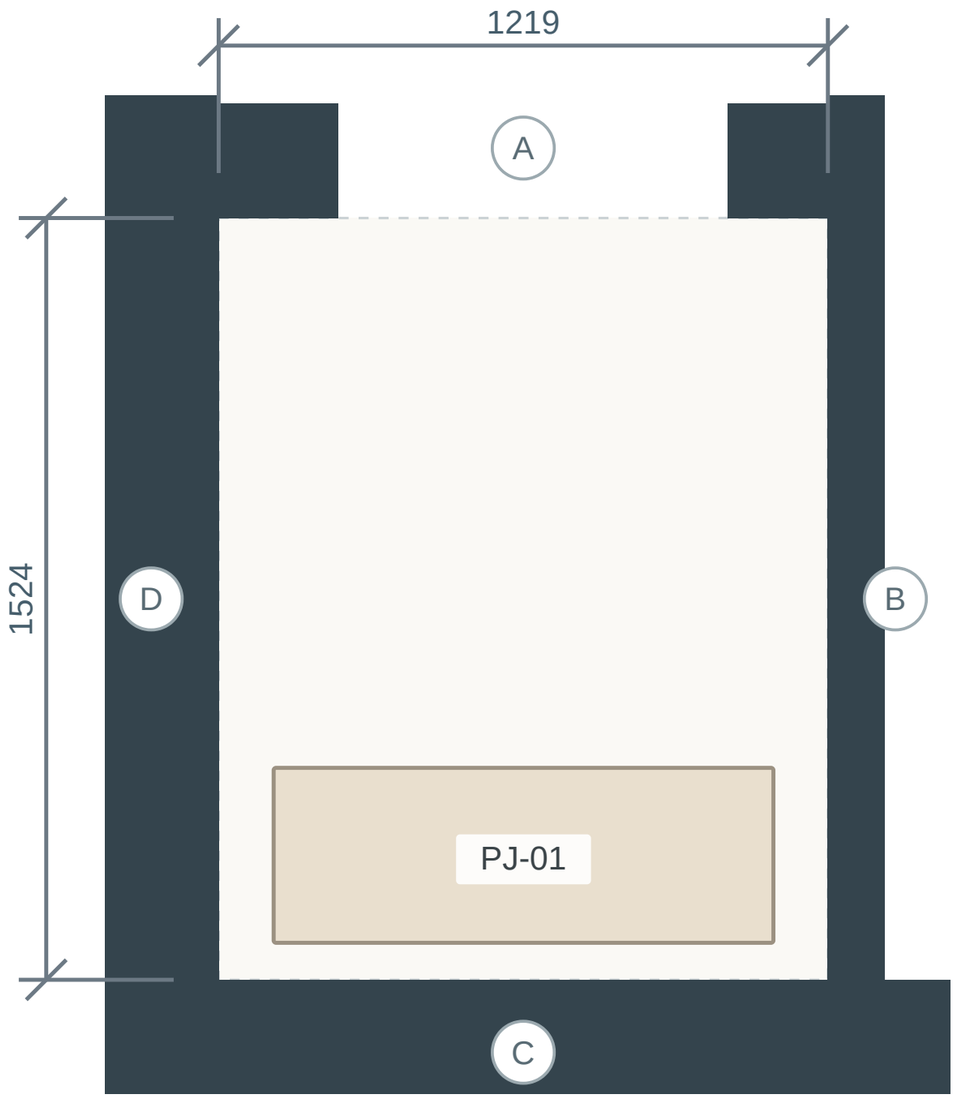

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Puja

Printed PDF label: 4′ × 5′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
PJ-01	Altar cabinet	1000 × 350 × 650	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

Shallow altar shelf against back wall, with closed lower storage. Keep the opening and floor clear for seated use. Use a heat-safe tray and ventilation if using a flame.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Puja / furniture layout**	**DD–04 / 12 OCT 2026**	**A-104 / mm · NTS**

Family bedroom / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

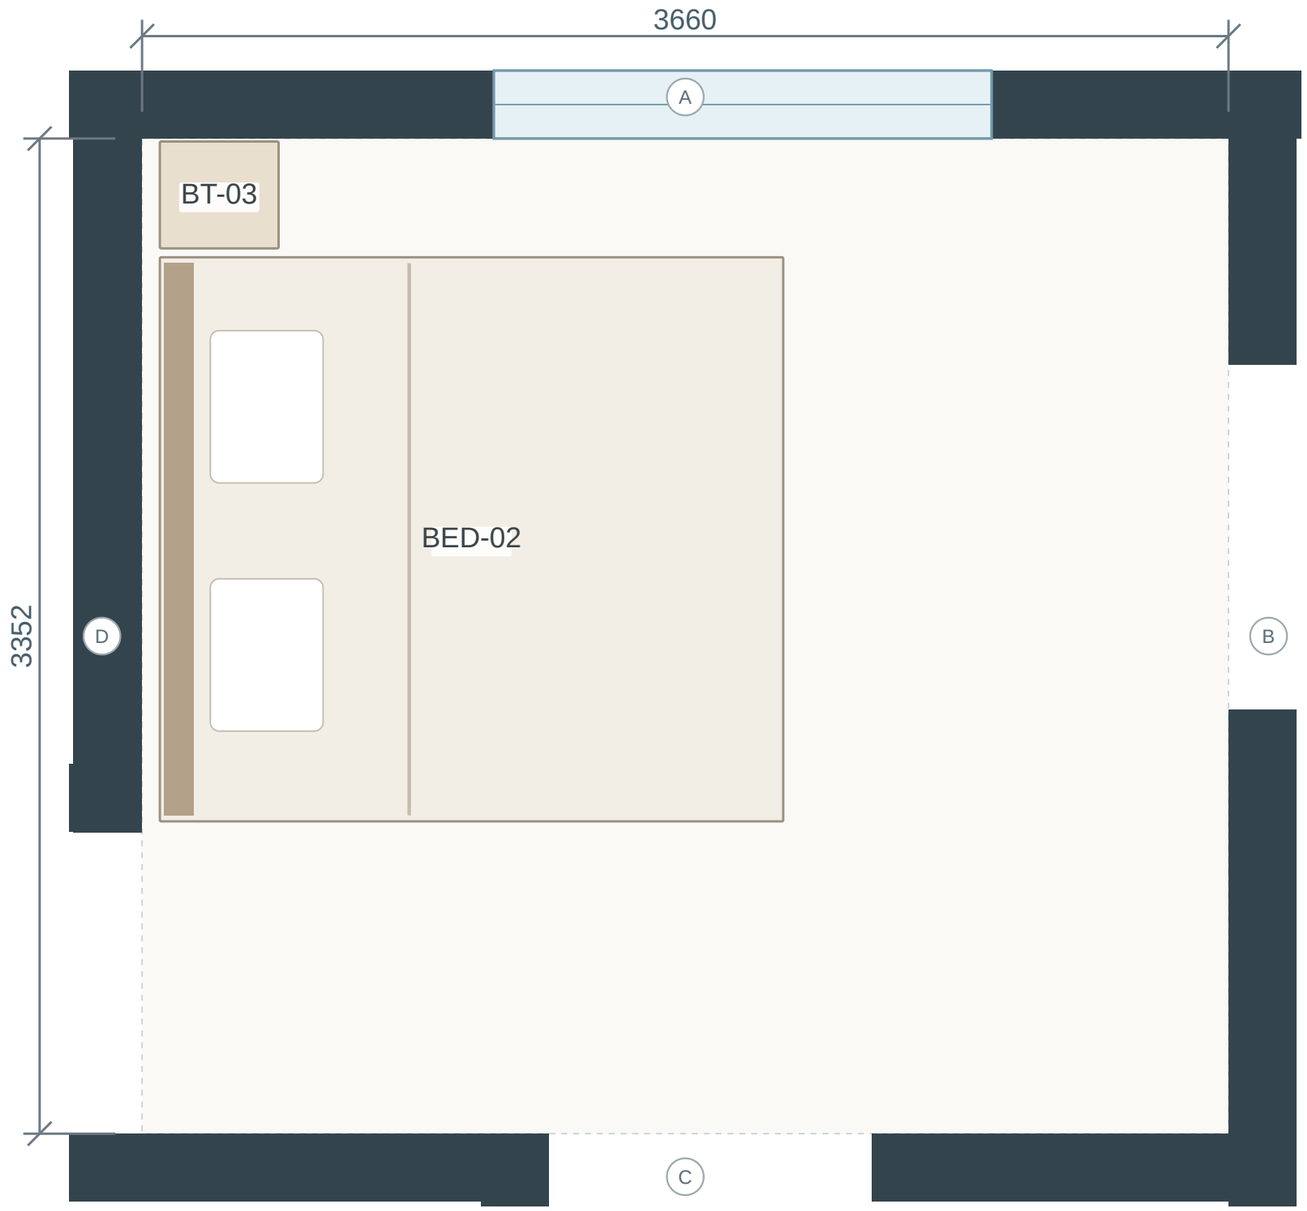

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Family bedroom

Printed PDF label: 12′ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
BED-02	Six-foot parent bed / frame reservation	2100 × 1900 × 1130	1
BT-03	Compact bedside table	400 × 360 × 500	1
COT-01	Separate infant cots + matched mattresses	700 × 1300 × 1100	2

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

6-foot-wide parent bed confirmed. A proposed 1900 × 2100 mm overall frame allowance retains the PDF headboard direction; choose the actual frame and mattress before ordering. Two separate baby cots are included in the item list, but their positions are held for a measured fit check. The previous side-wall placement obstructed the dressing route. The larger frame is shifted toward the rear, clear of the original family-entry span. Approximately 1052 mm remains to the lower room face and 1500 mm at its foot. These geometric gaps are not approved circulation clearances. Resolve both cot positions and dressing/store access before bedroom fit-out.

Open dependencies

F01: Prove the six-foot bed and two-cot arrangement


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Family bedroom / furniture layout**	**DD–04 / 12 OCT 2026**	**A-105 / mm · NTS**

Grandparents’ bedroom / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

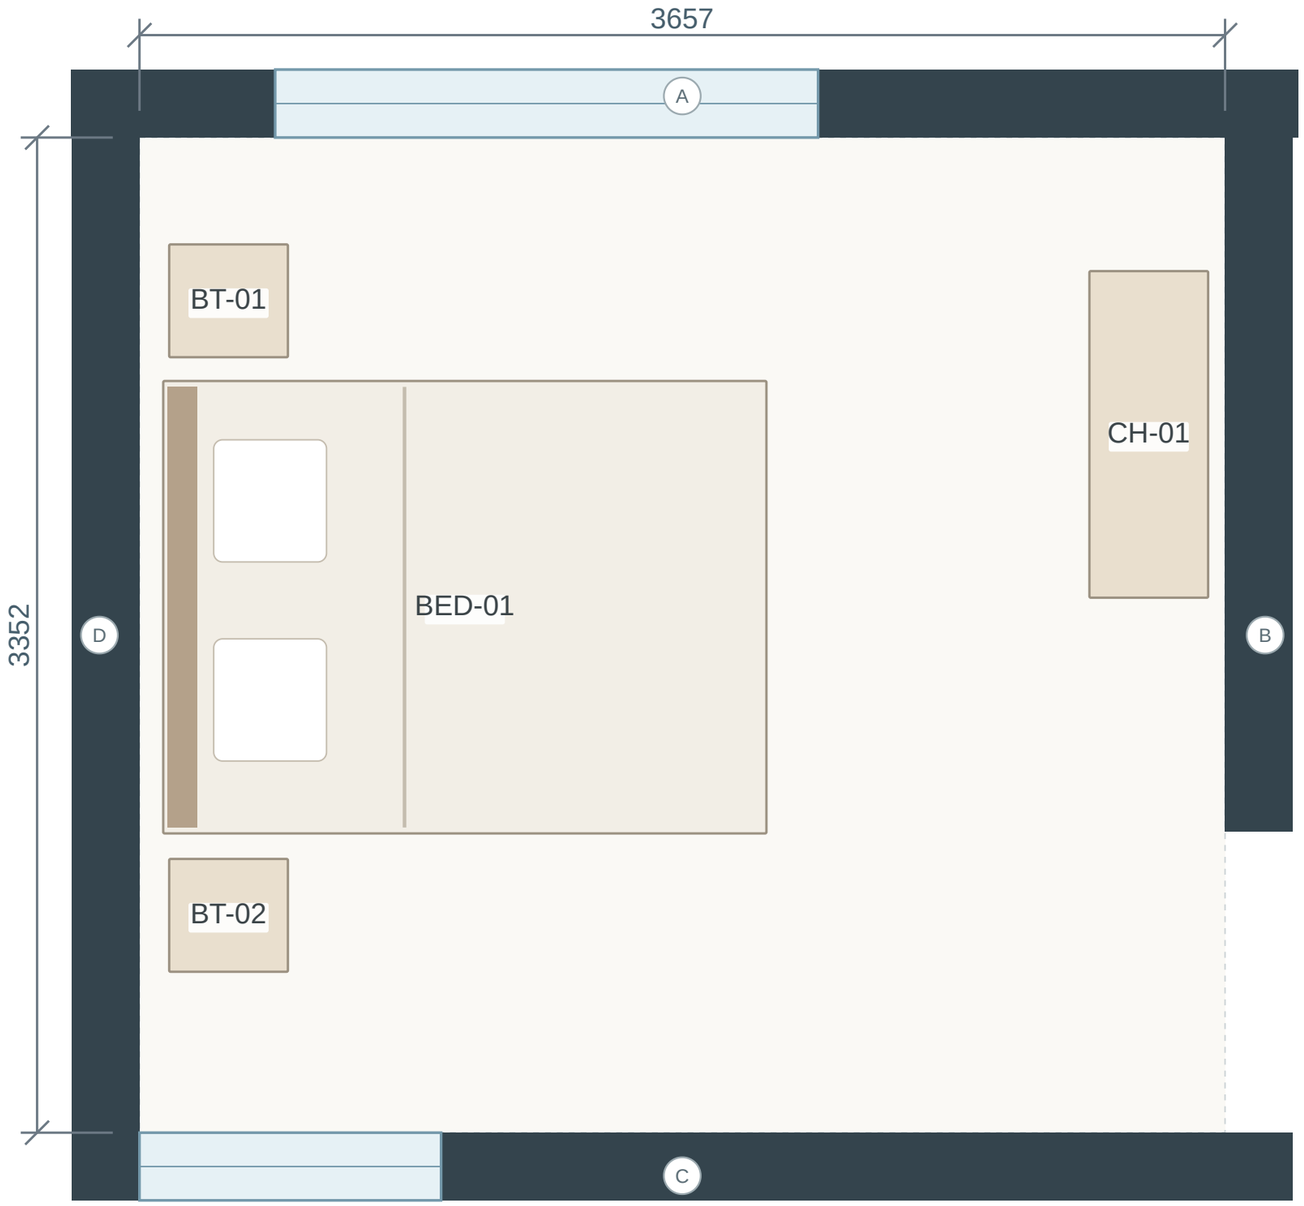

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Grandparents’ bedroom

Printed PDF label: 12′ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
BED-01	Grandparents’ bed	2032 × 1524 × 1130	1
BT-01	Bedside table	400 × 380 × 500	1
BT-02	Bedside table	400 × 380 × 500	1
CH-01	Shallow chest	400 × 1100 × 1000	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

1524 × 2032 mm bed proposal, retaining the west-side headboard direction shown in the PDF. Two compact bedside tables; no loose rug on the night route. A shallow chest for daily clothing. Full hanging storage is in the shared dressing area; wardrobe allocation is still to be agreed.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Grandparents’ bedroom / furniture layout**	**DD–04 / 12 OCT 2026**	**A-106 / mm · NTS**

Dressing / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

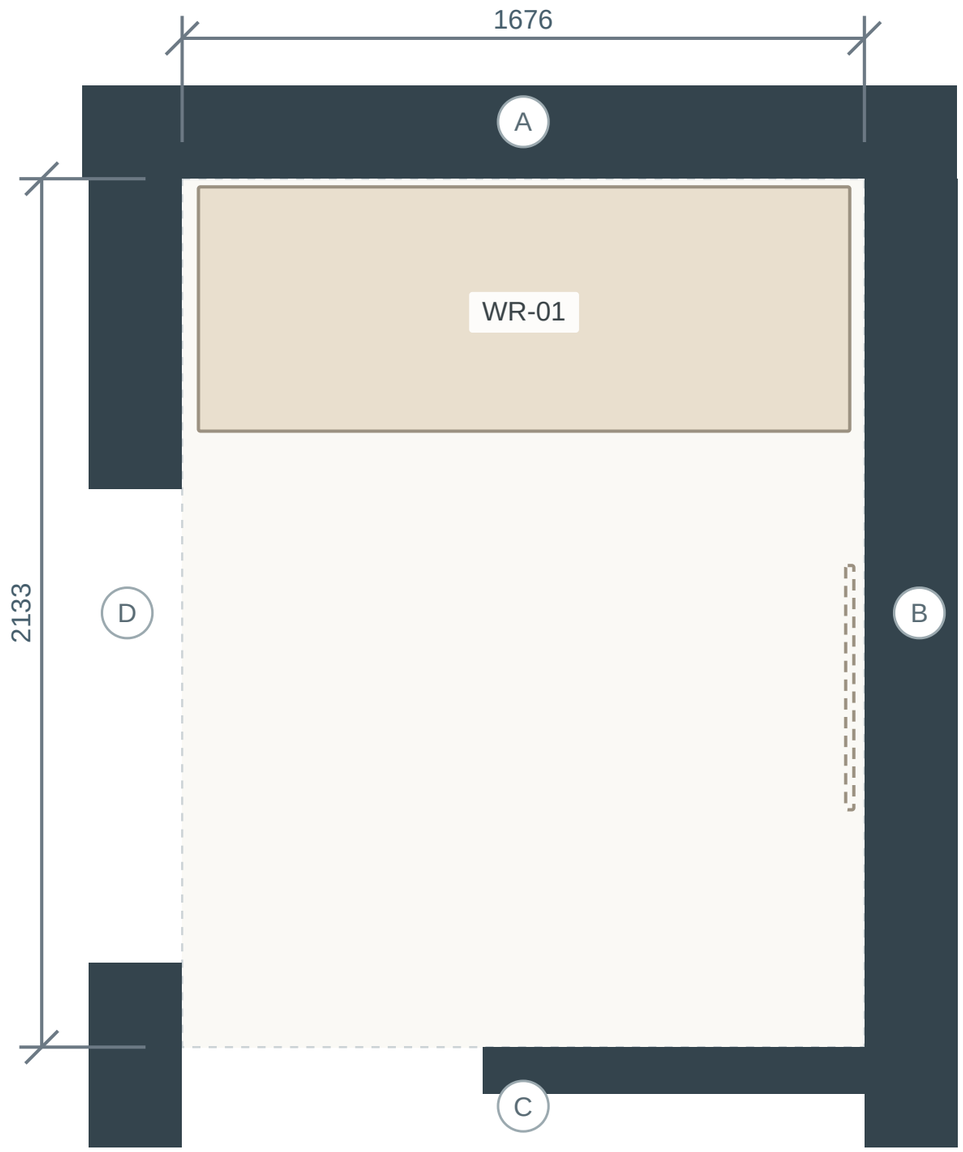

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Dressing

Printed PDF label: 5′6″ × 7′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
WR-01	Rear-wall wardrobe	1600 × 600 × 2400	1
MR-01	Wall mirror	20 × 600 × 1300	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

One 600 mm-deep wardrobe run against the rear wall, where storage hatching appears in the PDF. Clear central route from the family bedroom to the bathroom; do not place cabinets beside both doorways. Sliding fronts proposed; internal hanging, drawer and loft allocation still to be agreed.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.

All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Dressing / furniture layout**	**DD–04 / 12 OCT 2026**	**A-107 / mm · NTS**

Bathroom / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION



PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Bathroom

Printed PDF label: 5′6″ × 11′1½″.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
VA-01	Wall-mounted vanity	450 × 800 × 950	1
WC-01	WC reservation	680 × 400 × 750	1
SW-01	Shower zone	1636 × 900 × 2100	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

800 × 450 mm vanity near the dressing entry, WC in the middle and a 900 mm-deep shower zone at the far end. Wet/dry division is proposed; screen opening, drain, waterproofing build-up and fixture clearances need a coordinated bathroom drawing. Bathroom access remains exactly via the dressing area; no new common doorway is introduced.

Open dependencies

P01: Coordinate wet-area levels and plumbing


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Bathroom / furniture layout**	**DD–04 / 12 OCT 2026**	**A-108 / mm · NTS**

Study / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

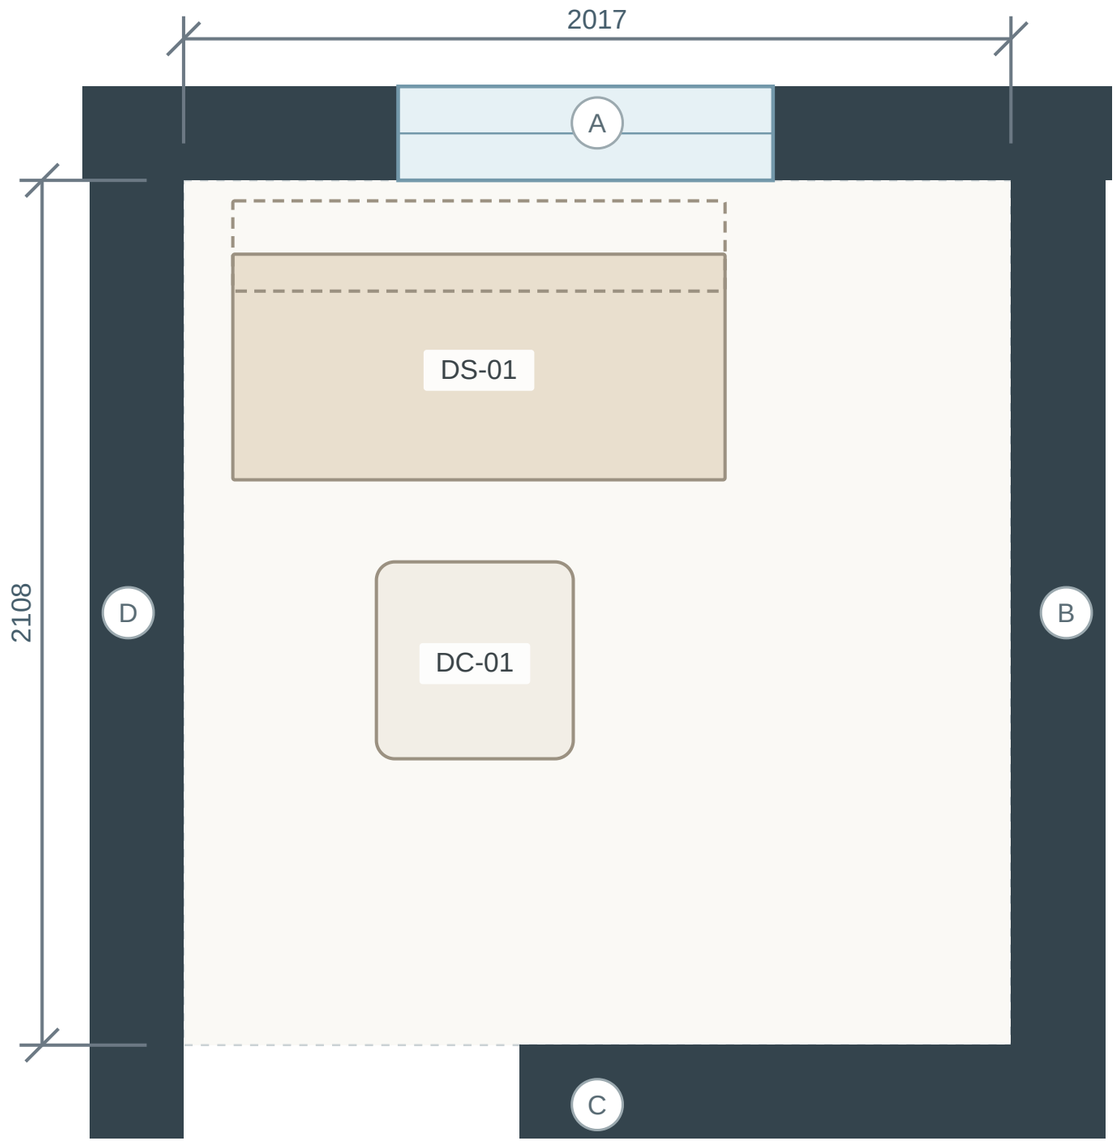

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Study

Printed PDF label: 6′7½″ × 6′9″.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
DS-01	Desk	1200 × 550 × 740	1
DC-01	Task chair	480 × 480 × 850	1
SH-01	Shallow wall shelf	1200 × 220 × 35	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

1200 × 550 mm desk with one chair and a shallow shelf. Keep the D2 entry clear. The PDF labels the rear opening V; a full-height picture window is not assumed. The printed depth differs from the vector drawing by about 50 mm; check before desk fabrication.

Open dependencies

D02: Resolve the study depth conflict


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Study / furniture layout**	**DD–04 / 12 OCT 2026**	**A-109 / mm · NTS**

Store / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

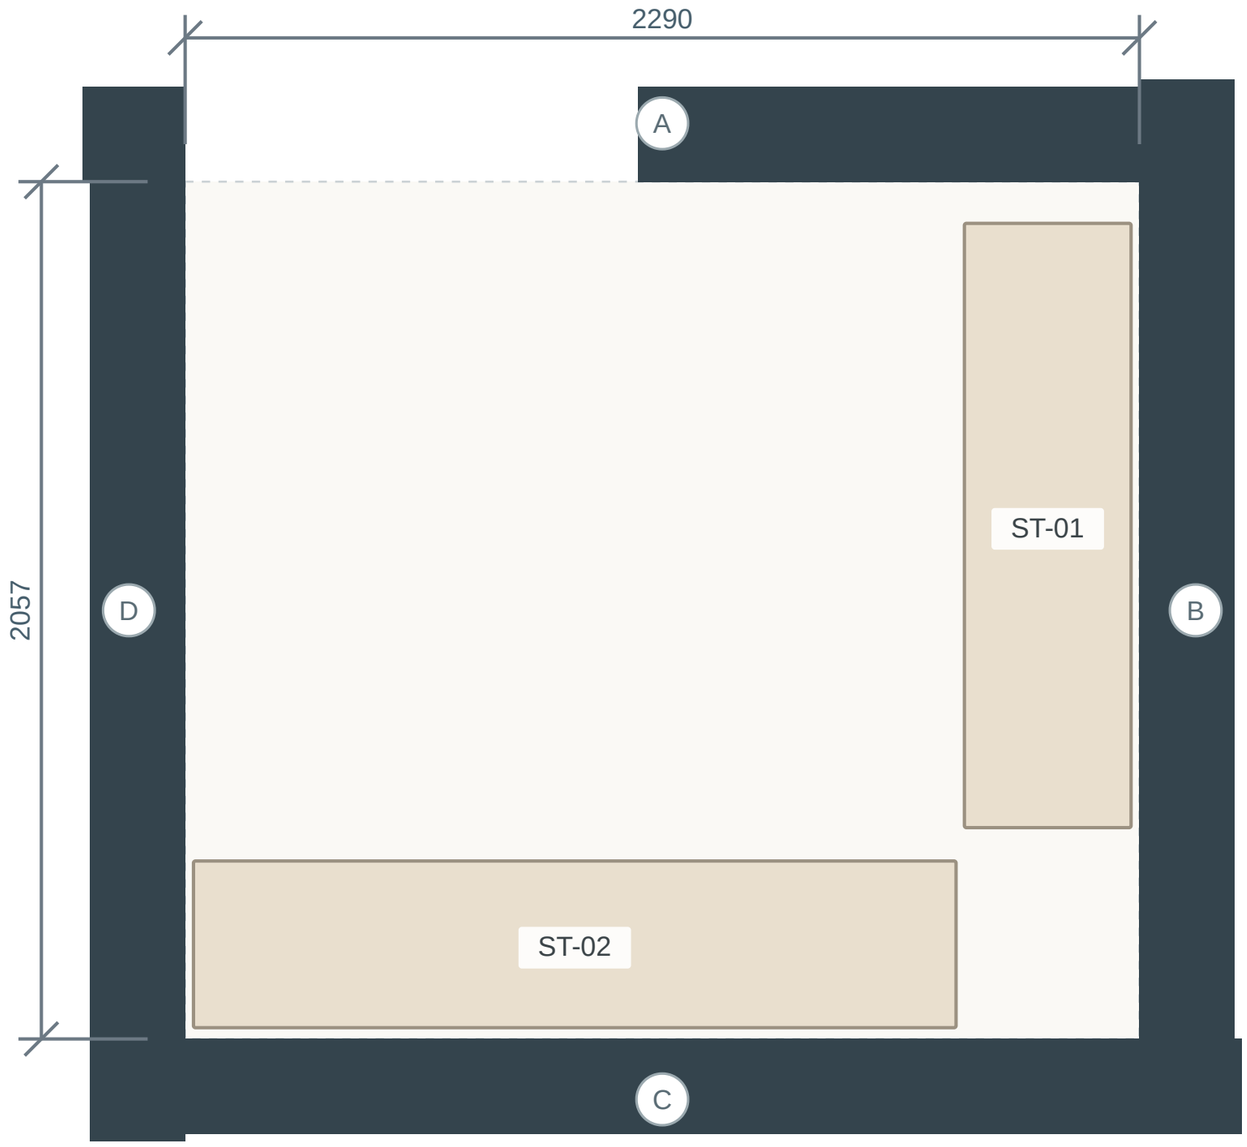

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Store

Printed PDF label: 7′6″ × 8′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty
ST-01	Side shelving	400 × 1450 × 2100	1
ST-02	Rear shelving	1830 × 400 × 2100	1

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

Two 400 mm-deep shelf runs proposed along the side and rear. Use the smaller drawn depth for this fit study, keeping the doorway open. The 8-foot label disagrees with the drawn 6-foot-9-inch depth. No shelf order until the architect resolves it.

Open dependencies

D01: Resolve the store depth conflict


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Store / furniture layout**	**DD–04 / 12 OCT 2026**	**A-110 / mm · NTS**

Staircase / furniture layout

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

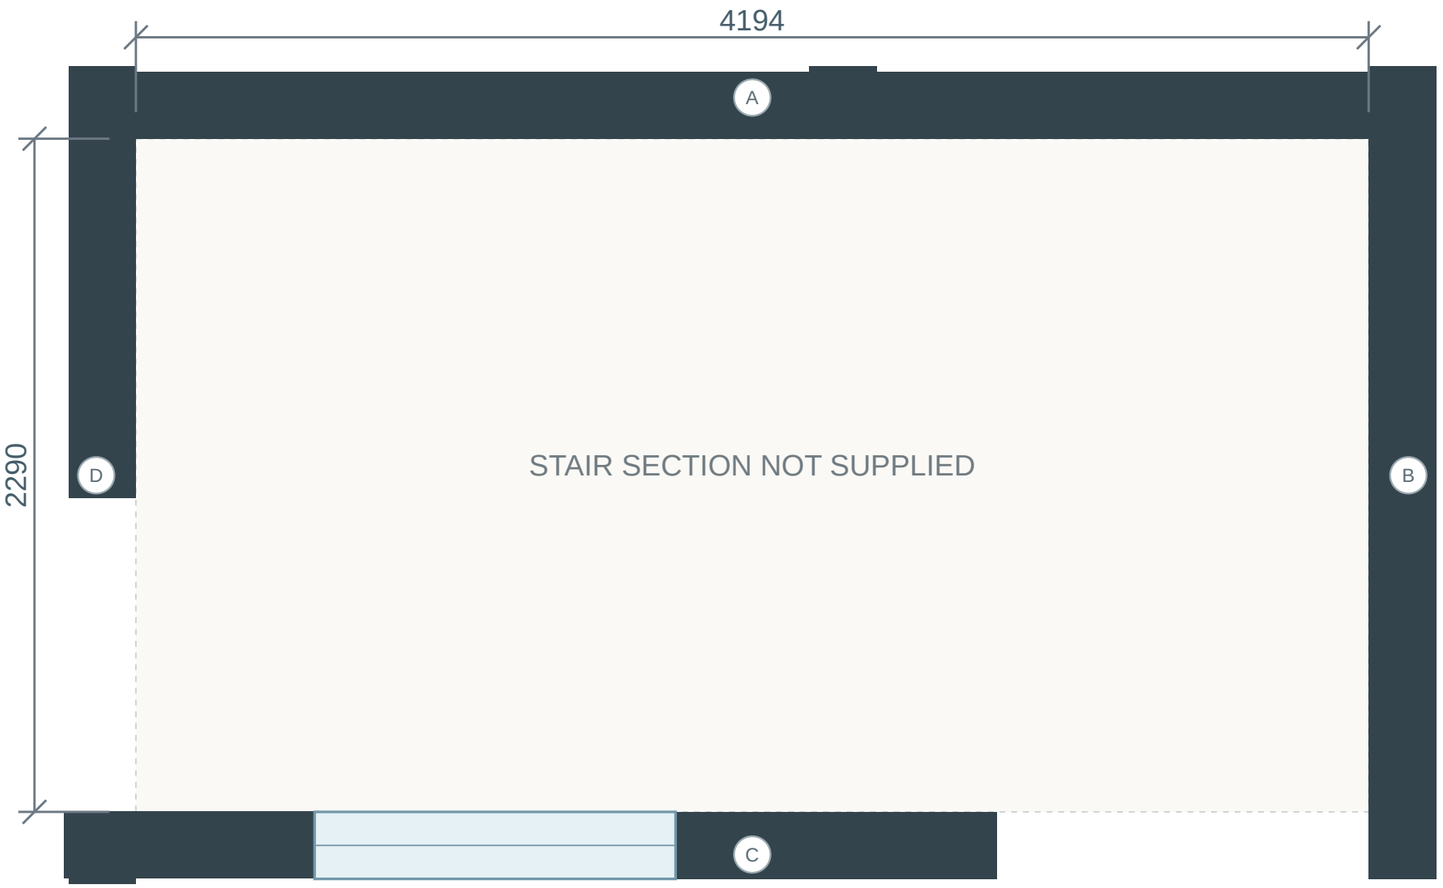

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Staircase

Printed PDF label: 7′6″ dimension shown; not a tread or rise schedule.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed item envelopes

Code	Item	Plan X × Y × H mm	Qty

Plan X/Y dimensions refer to orientation on this sheet, not factory width/depth. Items with placement held are absent from the drawing.

Design / coordination

The PDF stair footprint is retained. The model leaves the flight as a plan outline because floor height and risers are not supplied. Provide a continuous handrail, slip-resistant treads and low-level lighting after the architect fixes the stair section. Future upper floor stays in the brief; no new outdoor staircase or entrance is added.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Staircase / furniture layout**	**DD–04 / 12 OCT 2026**	**A-111 / mm · NTS**

Living & dining / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

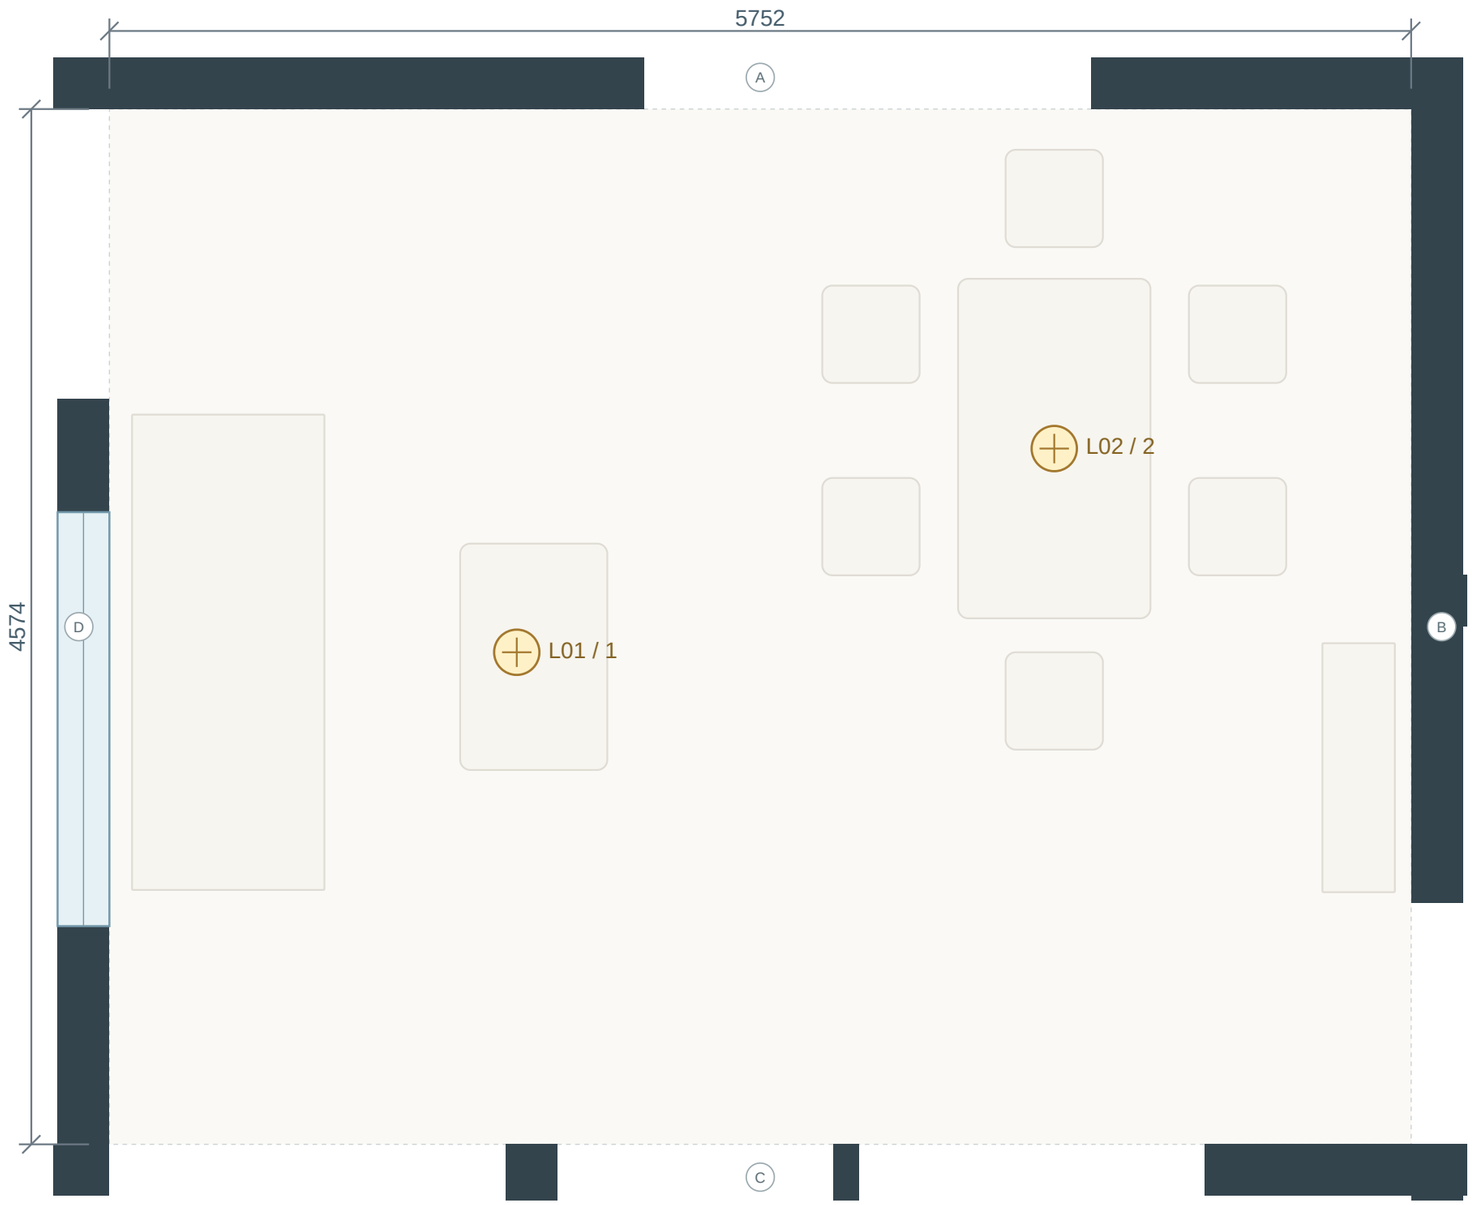

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Living & dining

Printed PDF label: 18′9″ × 15′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L01/1	Ambient + fan zone	1800 / 2400
L02/2	Dining pendant	4175 / 1500

3000 K ambient and dining pendant on separate dimmers. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

No AC requested here. Provide fan points with locations and quantities coordinated to room geometry, pendant lights and dining/seating. Preserve TV/data conduits and seating-area sockets.

Open dependencies

D03: Resolve the living-room width conflict


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Living & dining / lighting intent**	**DD–04 / 12 OCT 2026**	**L-201 / mm · NTS**

Drawing room / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

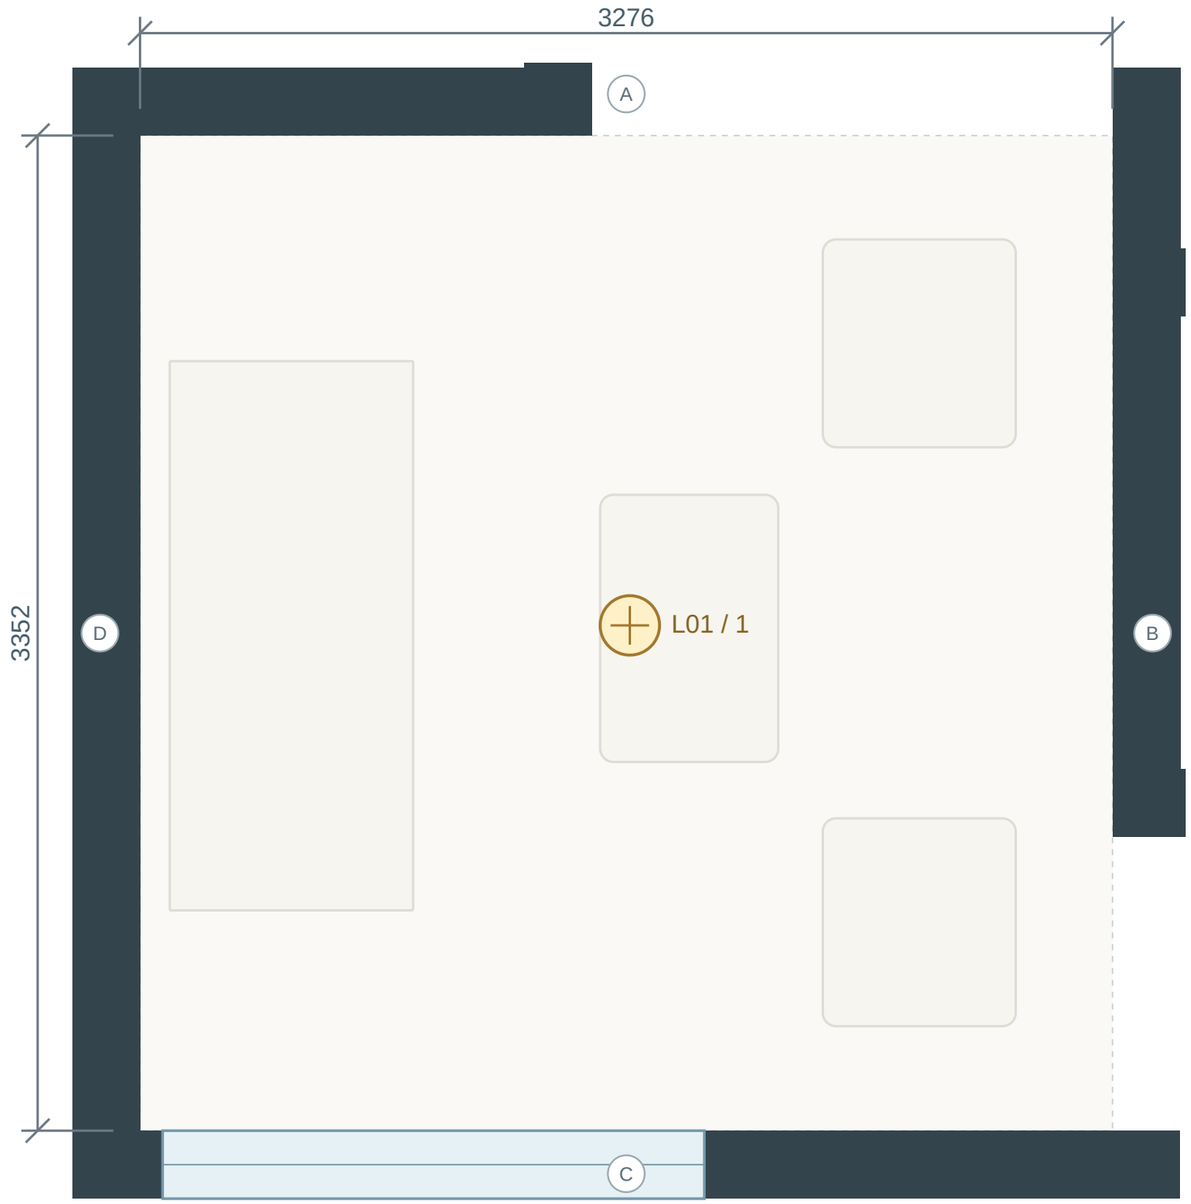

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Drawing room

Printed PDF label: 10′9″ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L01/1	Ambient + fan zone	1650 / 1650

3000 K layered light; one floor lamp rather than a heavy false ceiling. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

No AC requested here. Provide a ceiling fan point, general sockets and TV/data provision if needed; keep fan sweep clear of lights and curtains.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Drawing room / lighting intent**	**DD–04 / 12 OCT 2026**	**L-202 / mm · NTS**

Kitchen / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

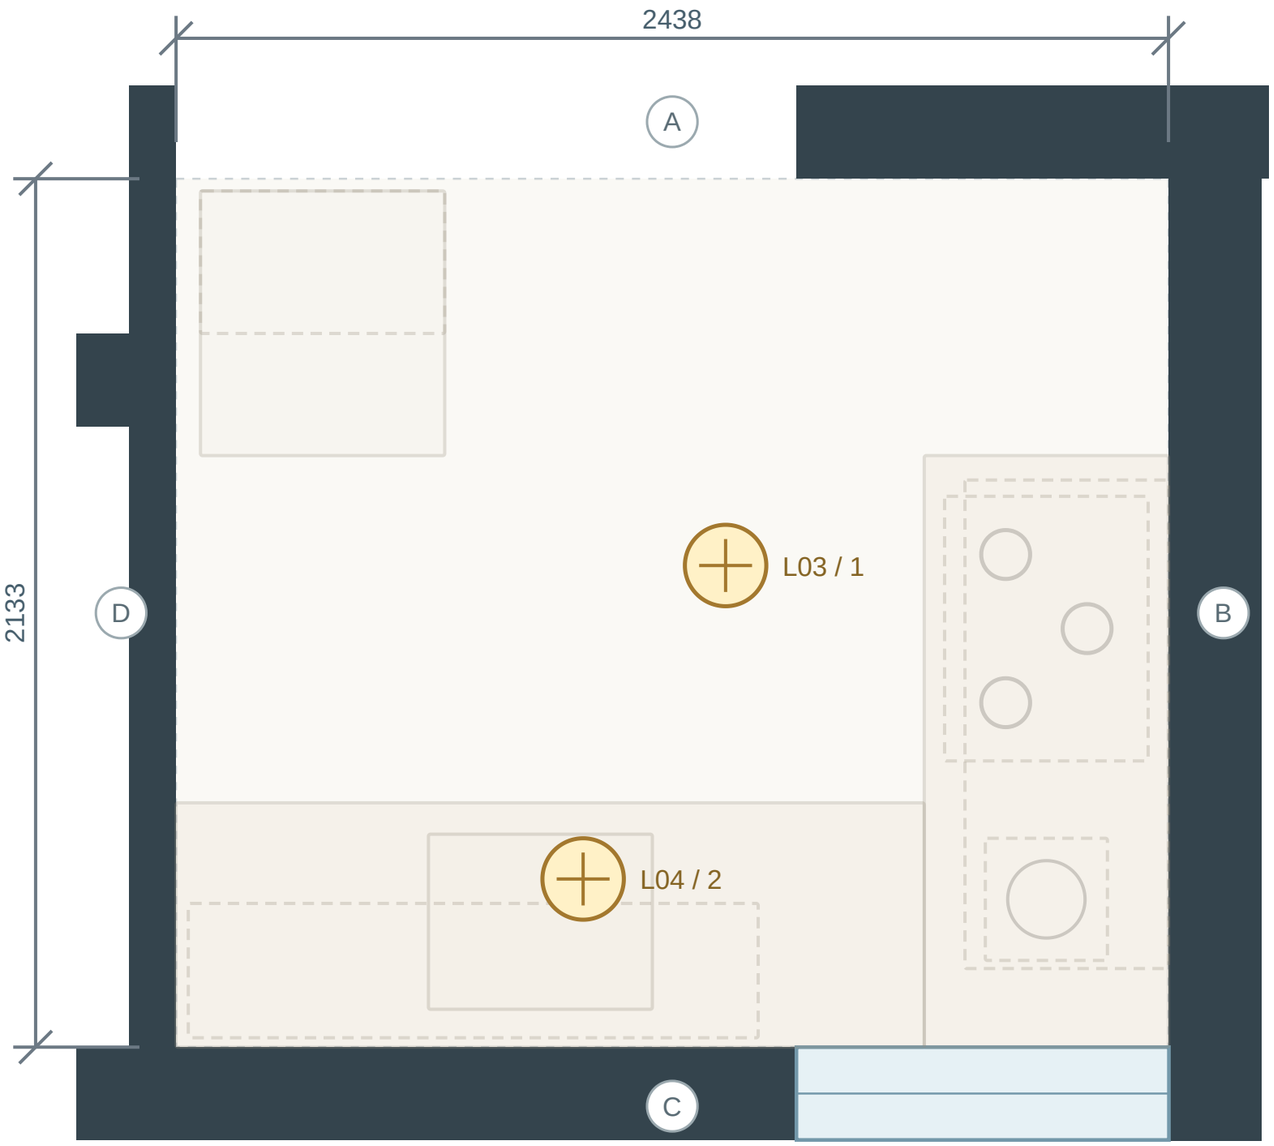

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Kitchen

Printed PDF label: 8′ × 7′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L03/1	General work light	1350 / 950
L04/2	Counter task light	1000 / 1720

4000 K under-cabinet task strips plus a ceiling light. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

For one main cook, with BOTH cooking units fixed in the counter: three gas burners and one induction zone. Coordinate gas supply/isolation, induction circuit and ventilation beneath the unit, sink/waste, filtered water, fridge and externally ducted extraction. Circuit ratings, duct size and gas route require chosen product instructions. Place accessible isolation outside hot/wet zones; do not discharge the hood into another room.

Open dependencies

K01: Select both fixed cooking appliances

K02: Coordinate gas and external extraction


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Kitchen / lighting intent**	**DD–04 / 12 OCT 2026**	**L-203 / mm · NTS**

Puja / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

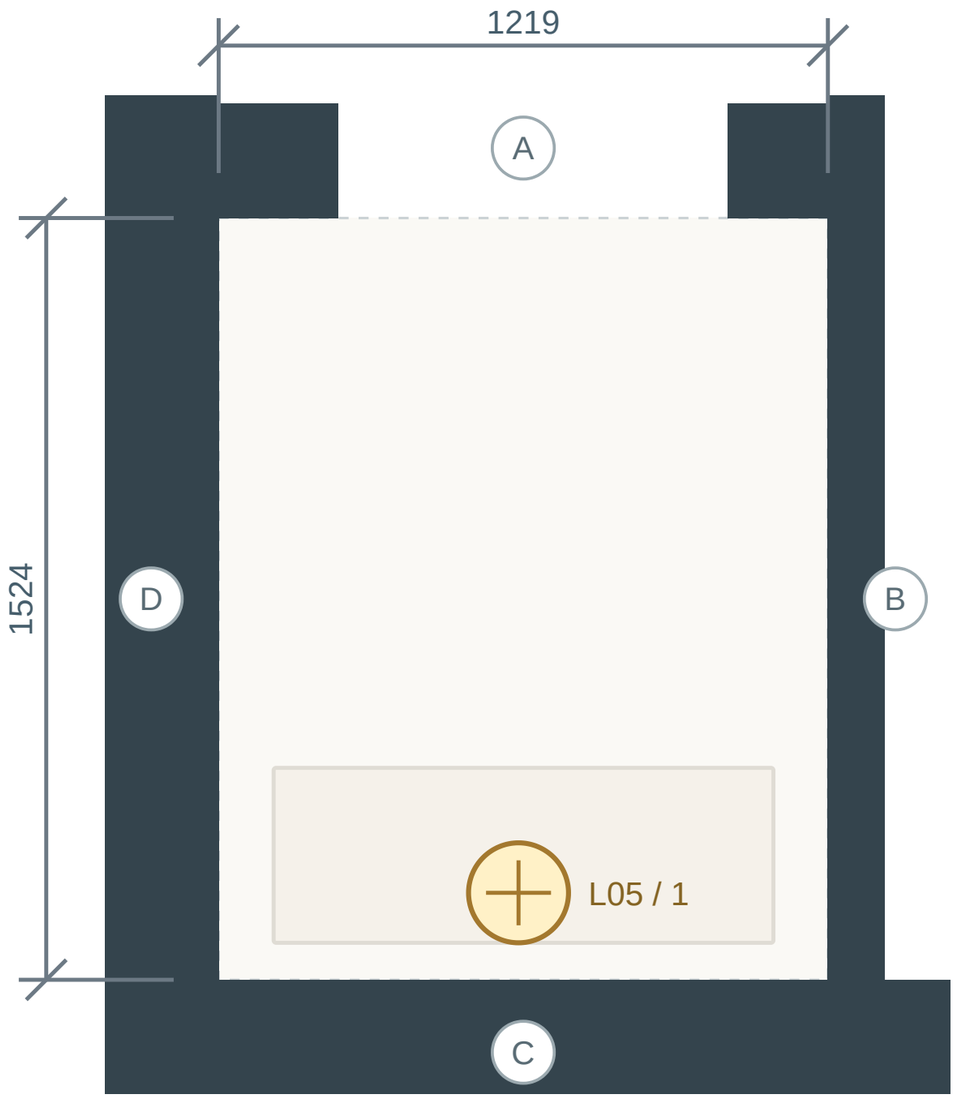

Puja

Printed PDF label: 4′ × 5′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L05/1	Altar accent	600 / 1350

2700–3000 K concealed light with accessible driver. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

One protected light circuit; no loose wiring beside lamps or incense.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.

All rooms also depend on the structural, electrical and joinery coordination requests.

PDF wall faces · furniture proposed · mm · do not scale for site work


DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	Puja / lighting intent	DD–04 / 12 OCT 2026	L-204 / mm · NTS

Family bedroom / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

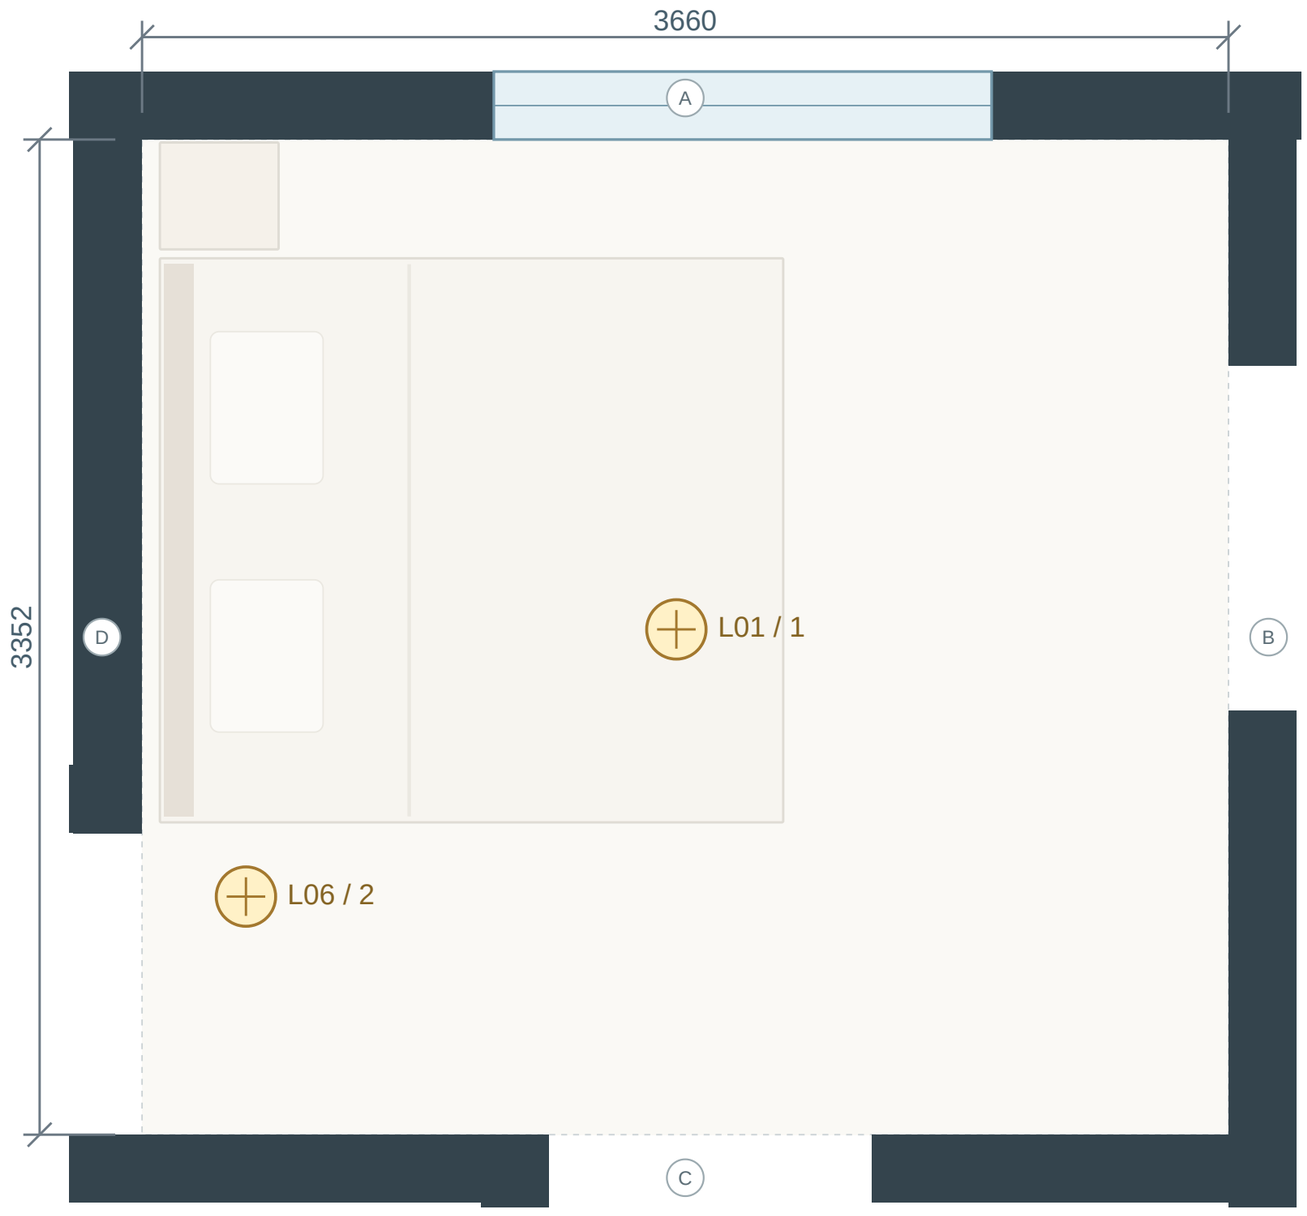

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Family bedroom

Printed PDF label: 12′ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L01/1	Dimmable ambient	1800 / 1650
L06/2	Low night-route light	350 / 2550

3000 K dimmable light; low-level night light toward bathroom. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

AC confirmed for the parents' and babies' bedroom. Choose unit position and adjustable airflow to avoid direct draughts at both cots. Coordinate a dedicated circuit, outdoor heat rejection and condensate drainage; type and load-based capacity remain pending.

Open dependencies

F01: Prove the six-foot bed and two-cot arrangement


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Family bedroom / lighting intent**	**DD–04 / 12 OCT 2026**	**L-205 / mm · NTS**

Grandparents’ bedroom / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

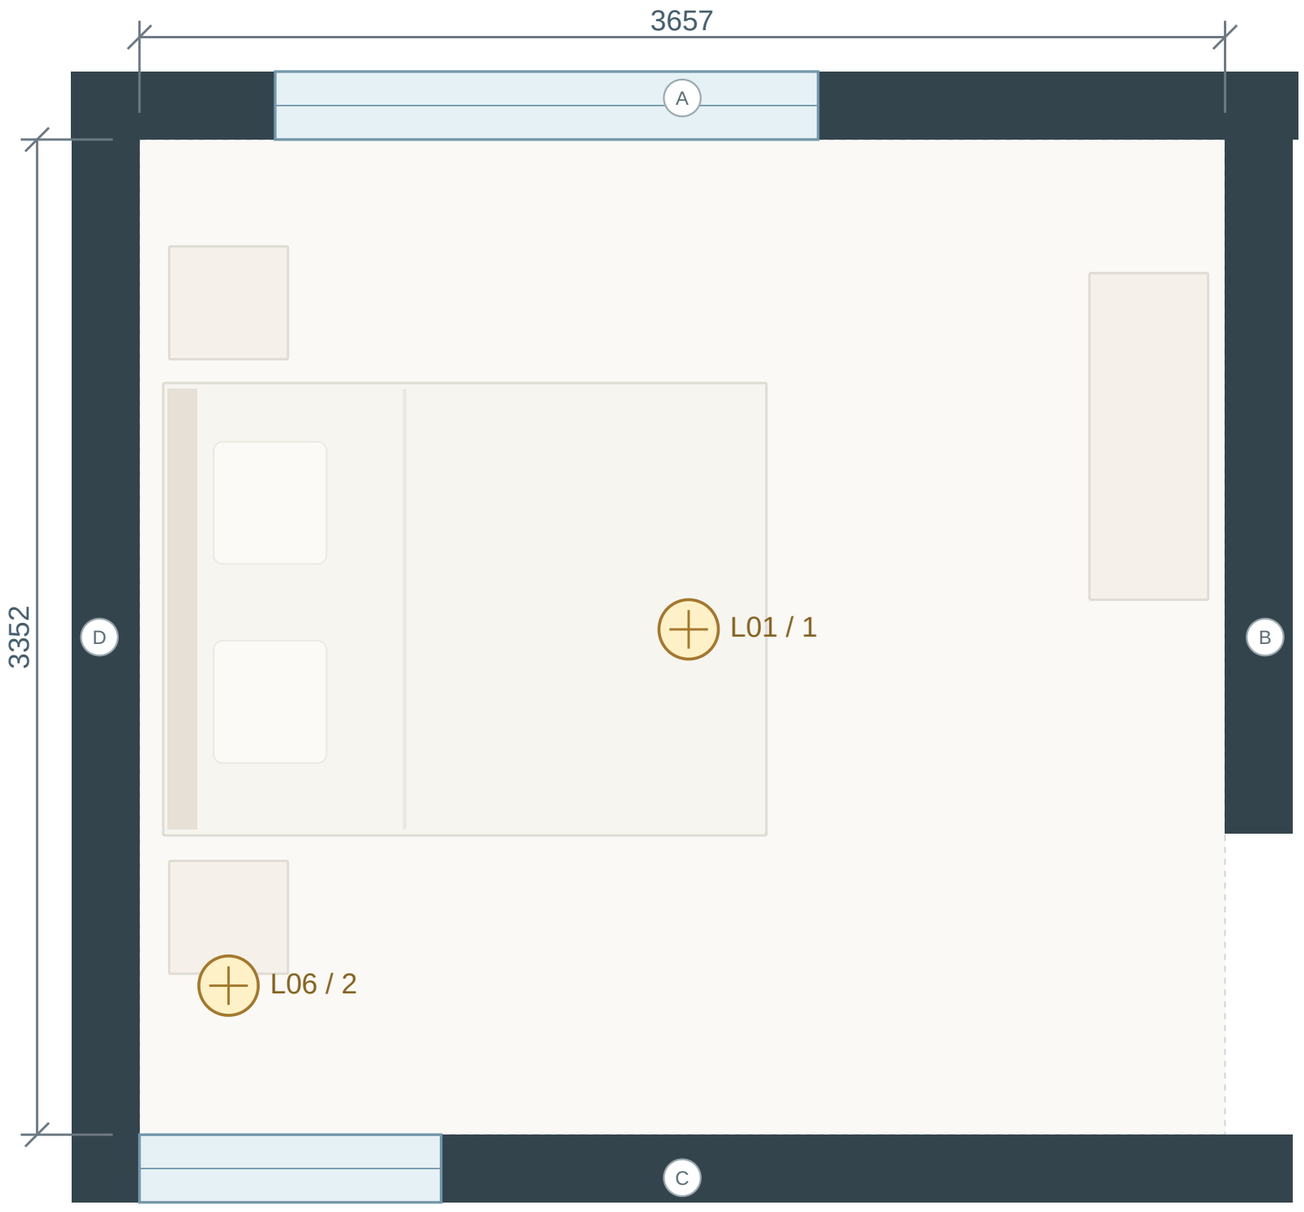

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Grandparents’ bedroom

Printed PDF label: 12′ × 11′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L01/1	Dimmable ambient	1850 / 1650
L06/2	Low night-route light	300 / 2850

3000 K dimmable ceiling light; reading lamps with separate switches. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

AC confirmed for this bedroom: dedicated circuit and protection sized by the electrician; equipment type and capacity pending. Coordinate power, outdoor heat rejection and condensate drainage before plaster. Keep bedside sockets and switches convenient.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Grandparents’ bedroom / lighting intent**	**DD–04 / 12 OCT 2026**	**L-206 / mm · NTS**

Dressing / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

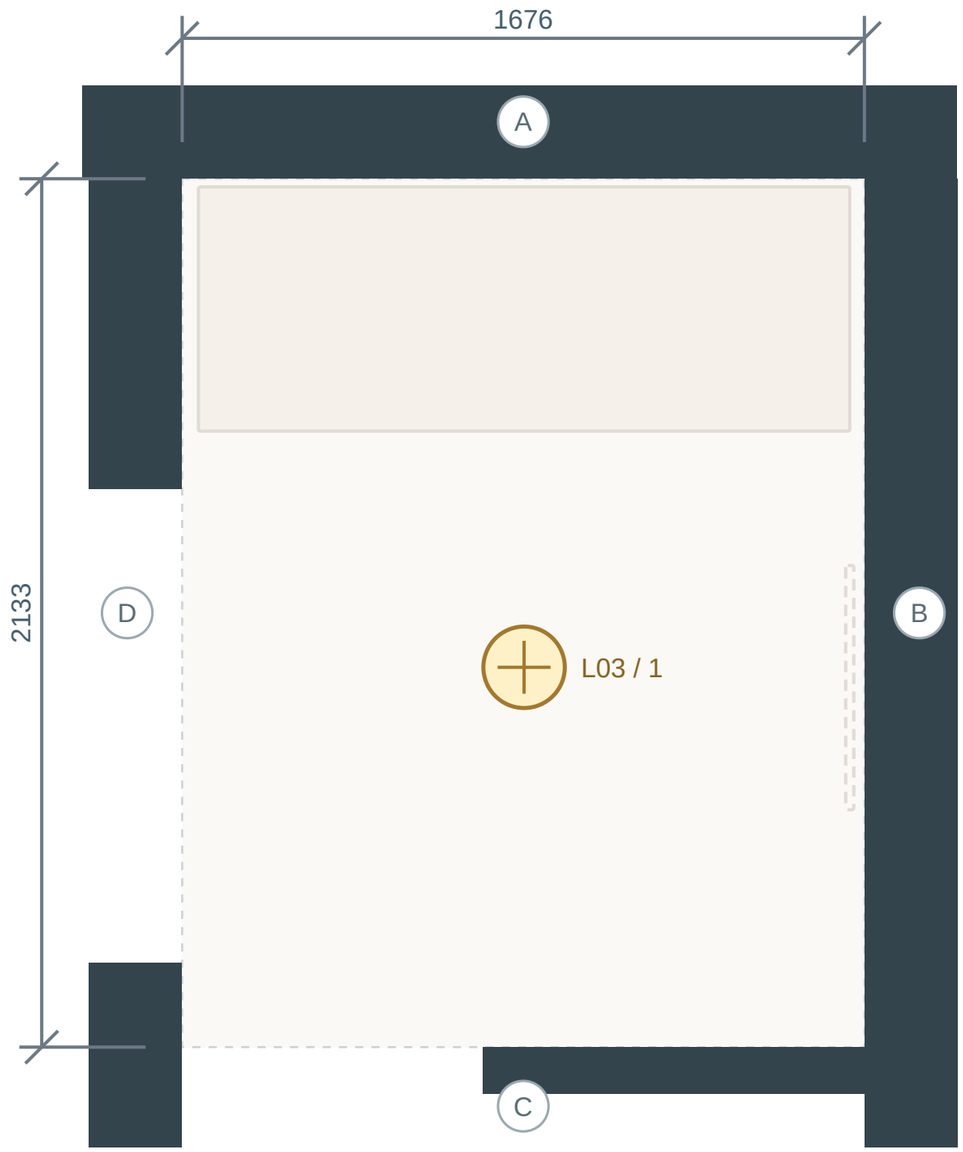

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Dressing

Printed PDF label: 5′6″ × 7′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L03/1	Mirror / wardrobe light	840 / 1200

3500–4000 K vertical mirror light, CRI 90 or higher. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

One grooming socket outside wet zone; ventilate enclosed cupboards.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Dressing / lighting intent**	**DD–04 / 12 OCT 2026**	**L-207 / mm · NTS**

Bathroom / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

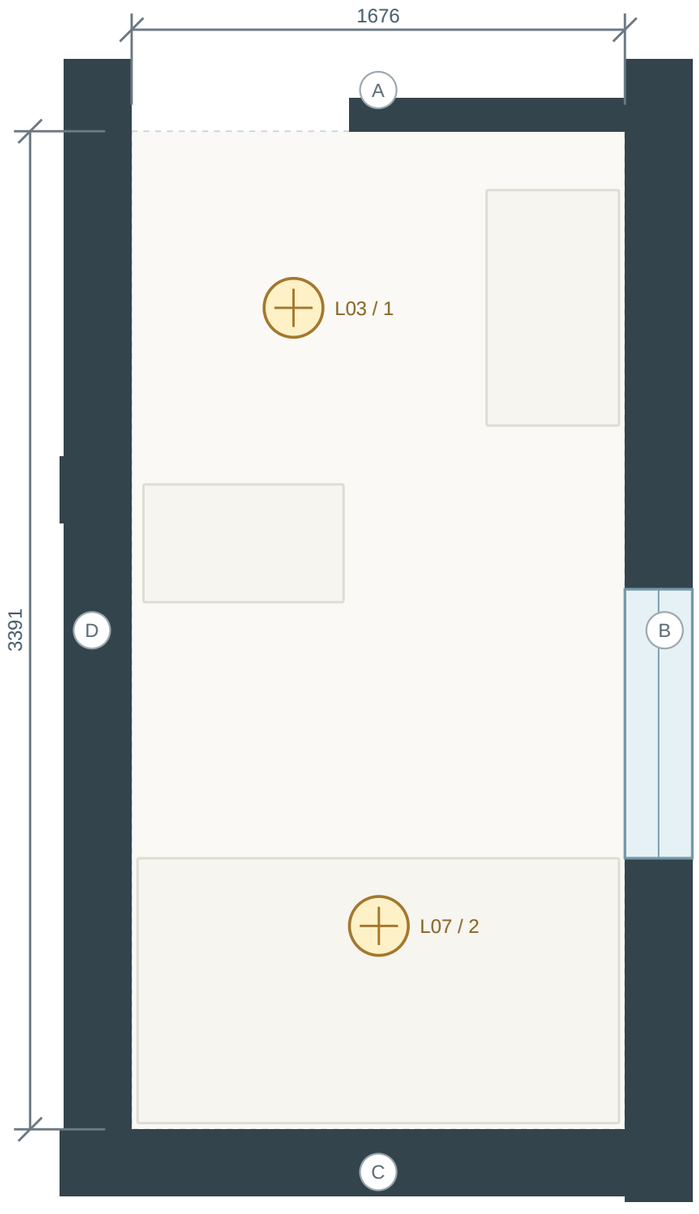

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Bathroom

Printed PDF label: 5′6″ × 11′1½″.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L03/1	Mirror light	550 / 600
L07/2	Wet-area light	840 / 2700

4000 K mirror task lighting; wet-area rated fixtures chosen by installer. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

Provide bathroom exhaust to a confirmed outdoor discharge point, with a roof route considered if the side gap is obstructed; do not exhaust into an enclosed gap or another room. Coordinate duct, geyser circuit, earthing and wet-area fittings before construction. Electric geyser confirmed by owner; capacity, location, nameplate load, mounting support, relief discharge and accessible service arrangements remain to be coordinated.

Open dependencies

P01: Coordinate wet-area levels and plumbing


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Bathroom / lighting intent**	**DD–04 / 12 OCT 2026**	**L-208 / mm · NTS**

Study / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

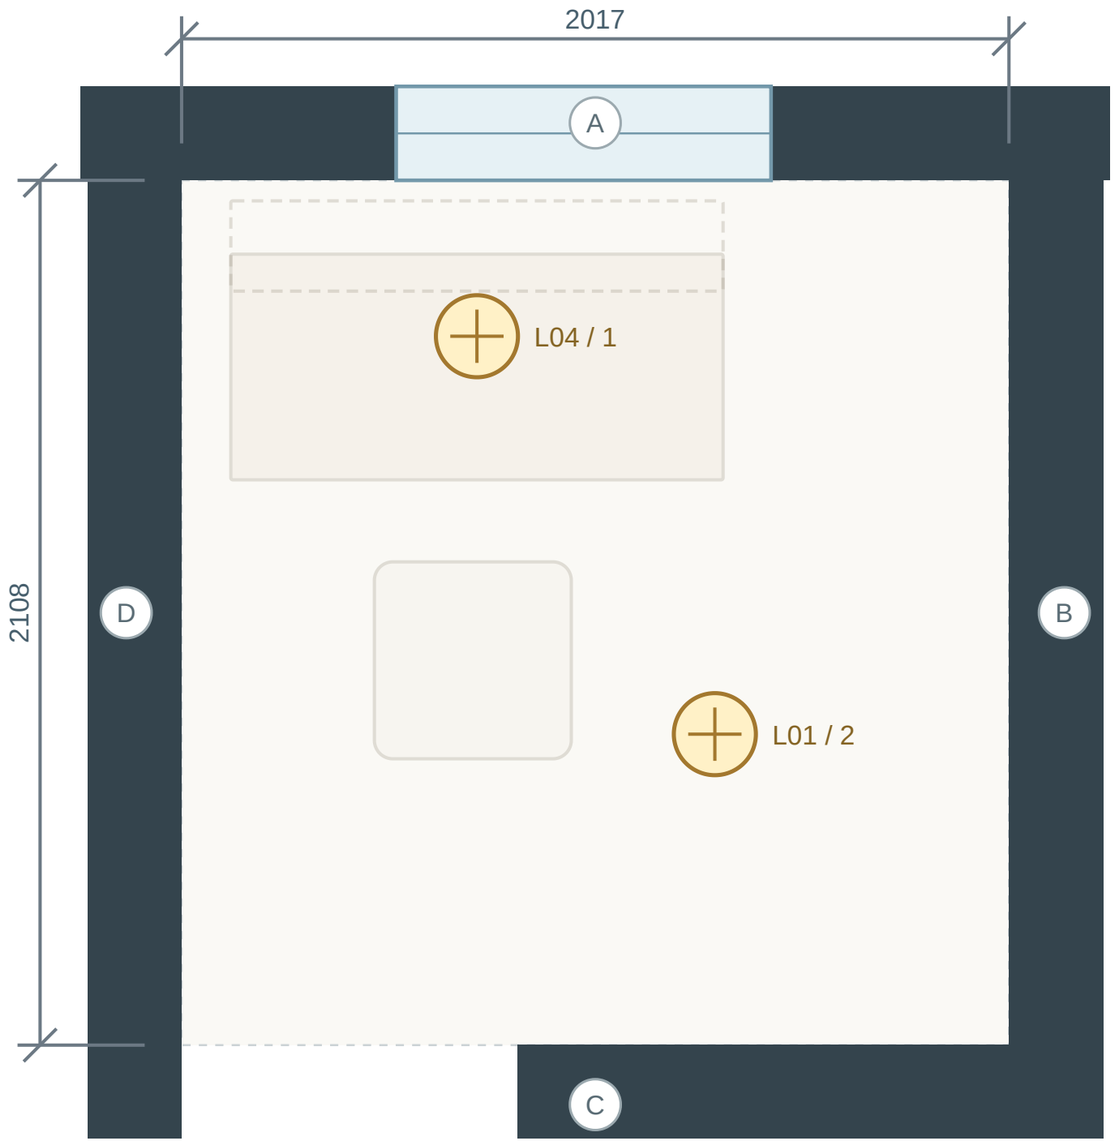

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Study

Printed PDF label: 6′7½″ × 6′9″.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L04/1	Desk task light	720 / 380
L01/2	Ambient	1300 / 1350

4000 K desk light, 3000 K ambient; control glare on screens. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

Desk sockets, data conduit and router route before plaster.

Open dependencies

D02: Resolve the study depth conflict


All rooms also depend on the structural, electrical and joinery coordination requests.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Study / lighting intent**	**DD–04 / 12 OCT 2026**	**L-209 / mm · NTS**

Store / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

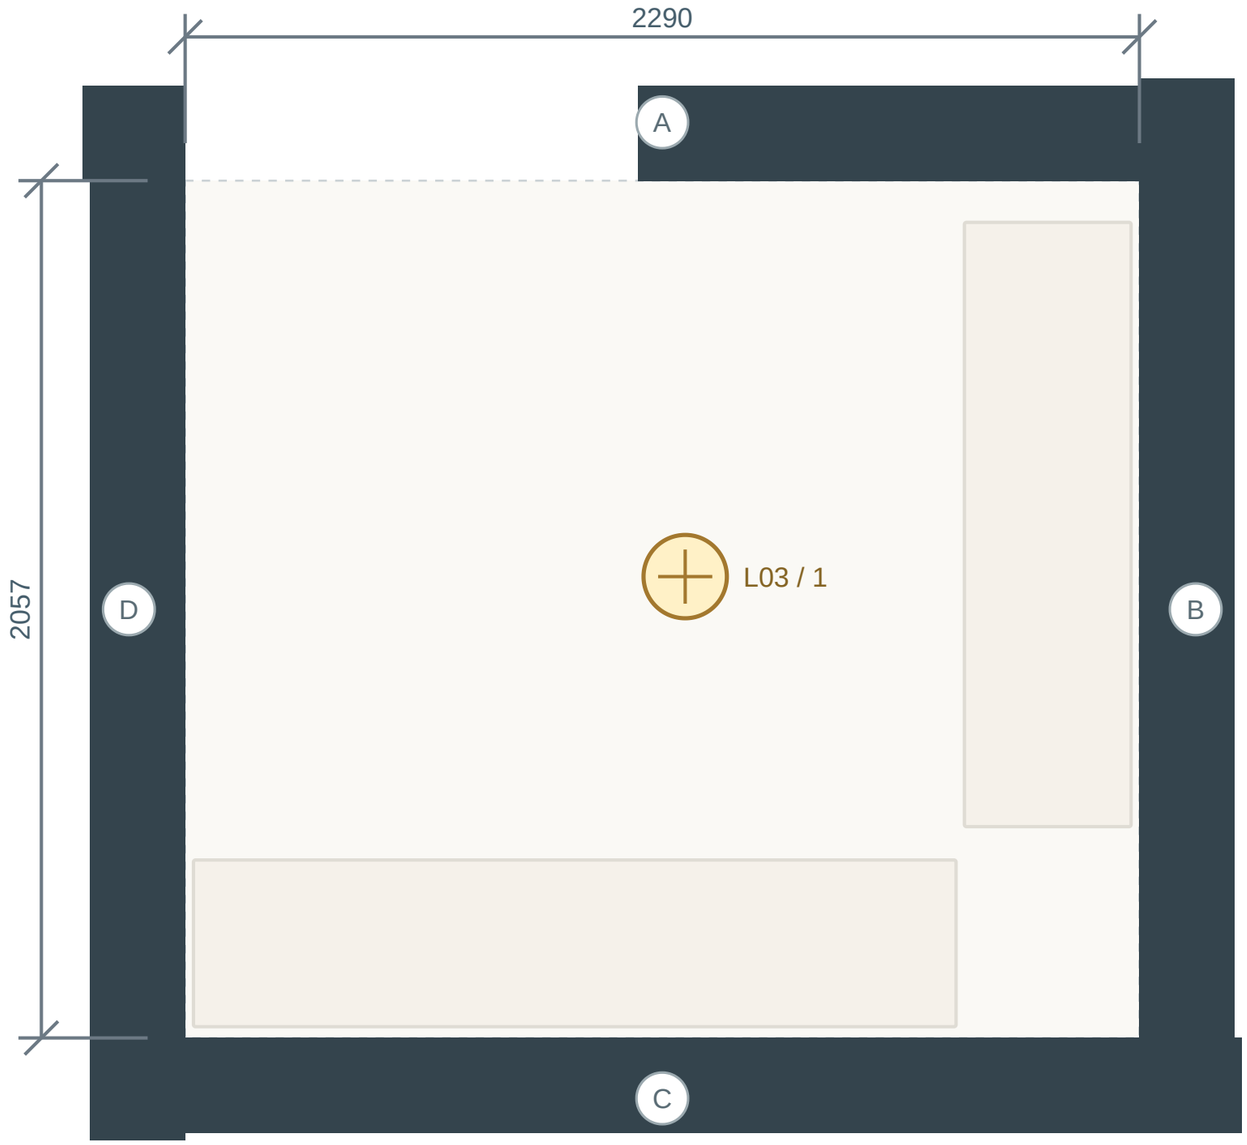

Store

Printed PDF label: 7′6″ × 8′.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L03/1	General light	1200 / 950

3500–4000 K bright ceiling light. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

One general socket and provision for future utility needs after plumbing review.

Open dependencies

D01: Resolve the store depth conflict

All rooms also depend on the structural, electrical and joinery coordination requests.

PDF wall faces · furniture proposed · mm · do not scale for site work


DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Store / lighting intent**	**DD–04 / 12 OCT 2026**	**L-210 / mm · NTS**

Staircase / lighting intent

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

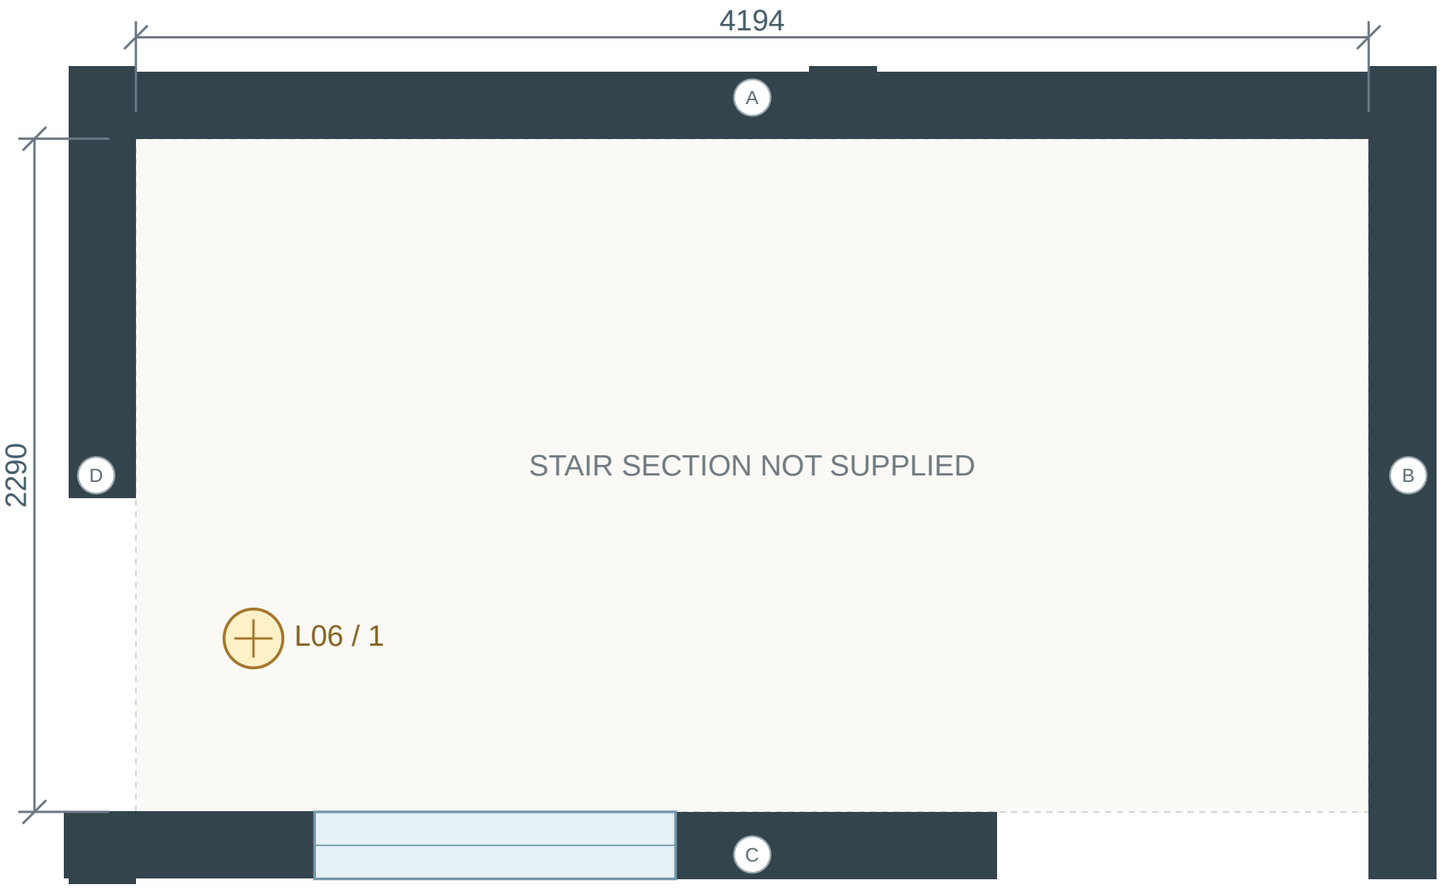

PDF wall faces · furniture proposed · mm · do not scale for site work

DESIGN DEVELOPMENT / NOT FOR CONSTRUCTION

Staircase

Printed PDF label: 7′6″ dimension shown; not a tread or rise schedule.

Source wall footprint retained; rounded drawing dimensions are not surveyed sizes. Door swings and levels are unconfirmed.

Proposed lighting zones

Ref	Intent	Plan X / Y mm
L06/1	Step-light provision	400 / 1700

Low-level step lighting and two-way switching. These are intent zones, not final luminaire counts, circuit or ceiling set-out.

Design / coordination

Foundation/plinth designed by an engineer for a future floor, as confirmed by user. Coordinate the existing structural drawings, stair geometry, headroom, future entry and service risers before continuing construction.

Open dependencies

R01: verify site dimensions. R02: confirm structure and levels. R03: complete opening schedule.

All rooms also depend on the structural, electrical and joinery coordination requests.


PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Staircase / lighting intent**	**DD–04 / 12 OCT 2026**	**L-211 / mm · NTS**

Kitchen / counter elevations

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION


Front counter · wall C

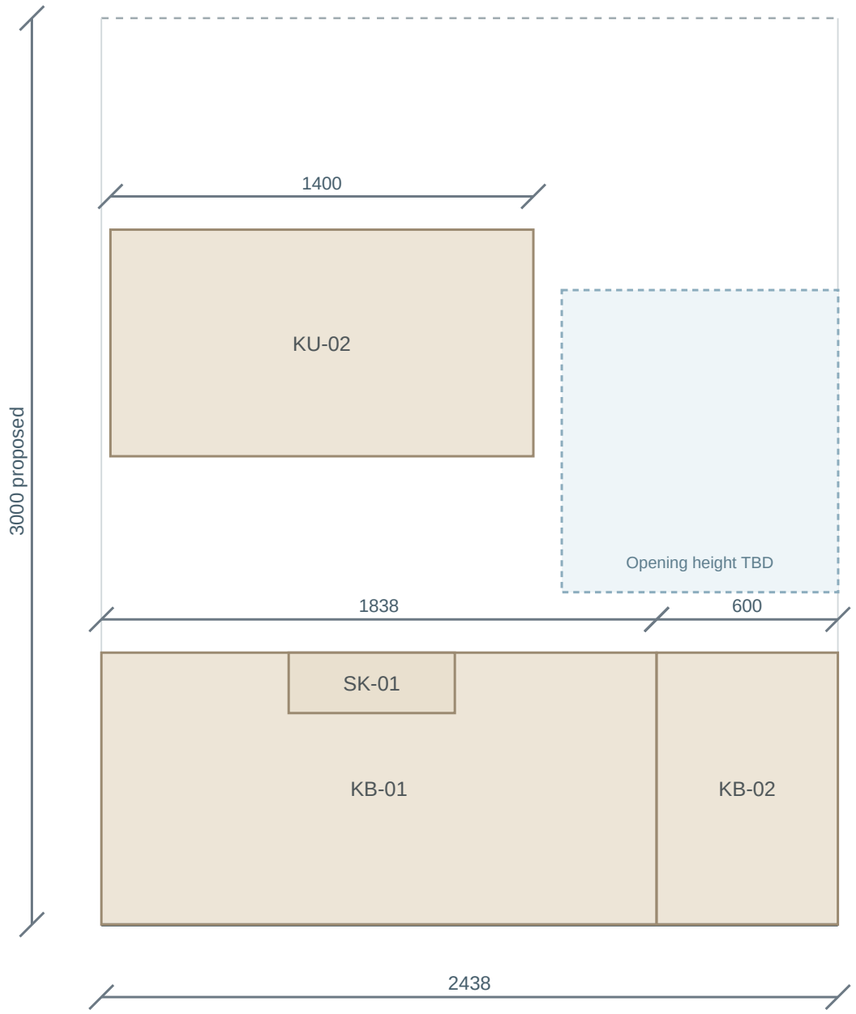

Horizontal: plan X axis · vertical: proposed heights above finished floor

ENVELOPE ONLY / NO CUT-OUTS, HARDWARE OR FABRICATION RELEASE

Cooking counter · wall B

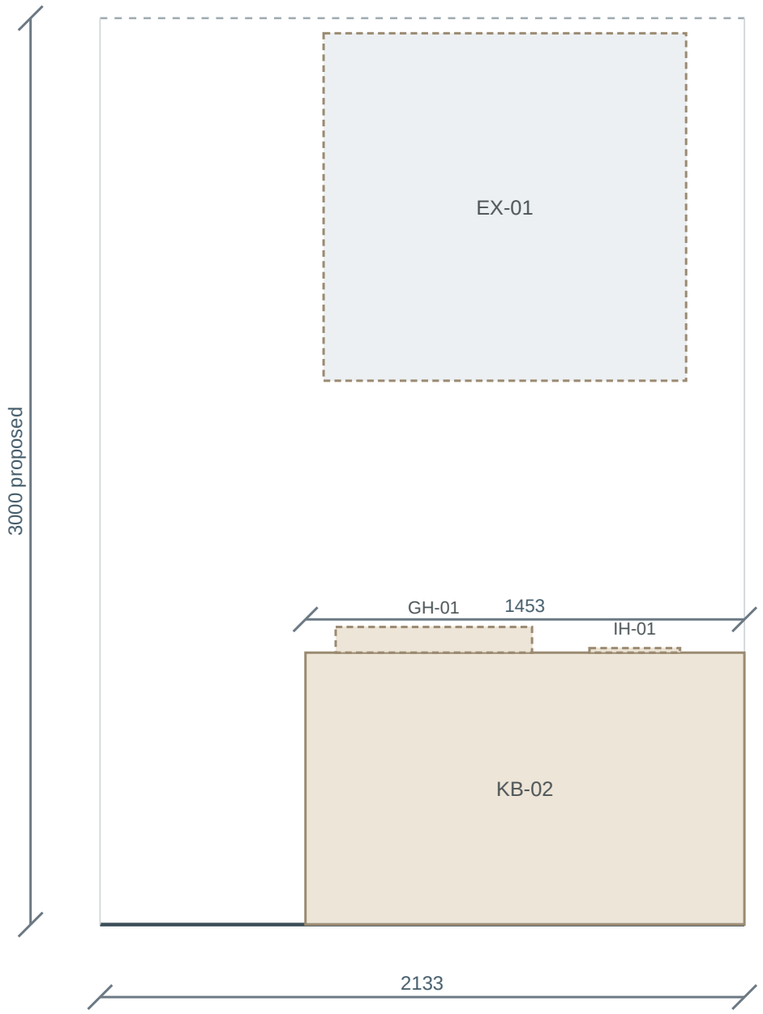

Horizontal: plan Y axis · vertical: proposed heights above finished floor

ENVELOPE ONLY / NO CUT-OUTS, HARDWARE OR FABRICATION RELEASE

Envelope projections only. Clear height 3000 mm, opening heights and all furniture heights are proposals. Manufacturer cut-outs, panel build-ups, fixings and hardware are not issued. Proposed base-counter height 900 mm. Right run 1450 mm; front run 1838 mm to the corner return. 600 mm nominal depth. Drawer divisions, corner access, countertop joints, sink bowl and hob clearances need the selected appliances and workshop drawings. No cabinet is added over KW. Front upper cabinets: 1400 W × 330 D × 750 H mm, underside 1550 mm. Keep the source KW opening clear; approve workshop elevations and hardware before manufacture. Two separate fixed cooking units now confirmed: three-burner gas plus single-zone induction. Generic surface reservations only; never cut the stone to these illustrative dimensions. Keep gas/induction services accessible and coordinate drawer depth below both units.


PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Kitchen / counter elevations**	**DD–04 / 12 OCT 2026**	**J-301 / mm · NTS**

Dressing / wardrobe envelope

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

Wardrobe · wall A

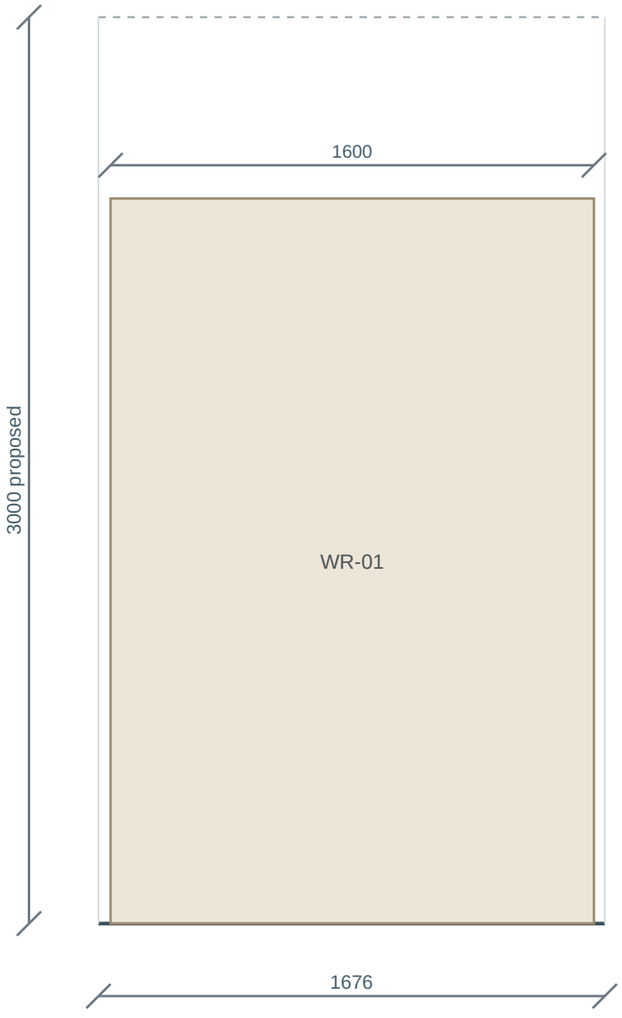

Horizontal: plan X axis · vertical: proposed heights above finished floor

ENVELOPE ONLY / NO CUT-OUTS, HARDWARE OR FABRICATION RELEASE

Envelope projections only. Clear height 3000 mm, opening heights and all furniture heights are proposals. Manufacturer cut-outs, panel build-ups, fixings and hardware are not issued. Proposed 1600 W × 600 D × 2400 H mm wardrobe. Two sliding fronts, one long-hanging bay, one double-hanging bay and lower drawers. Internal allocation and ventilation are pending; rear wall position follows the PDF hatch.


PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Dressing / wardrobe envelope**	**DD–04 / 12 OCT 2026**	**J-302 / mm · NTS**

Bathroom / vanity envelope

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

Vanity · wall B

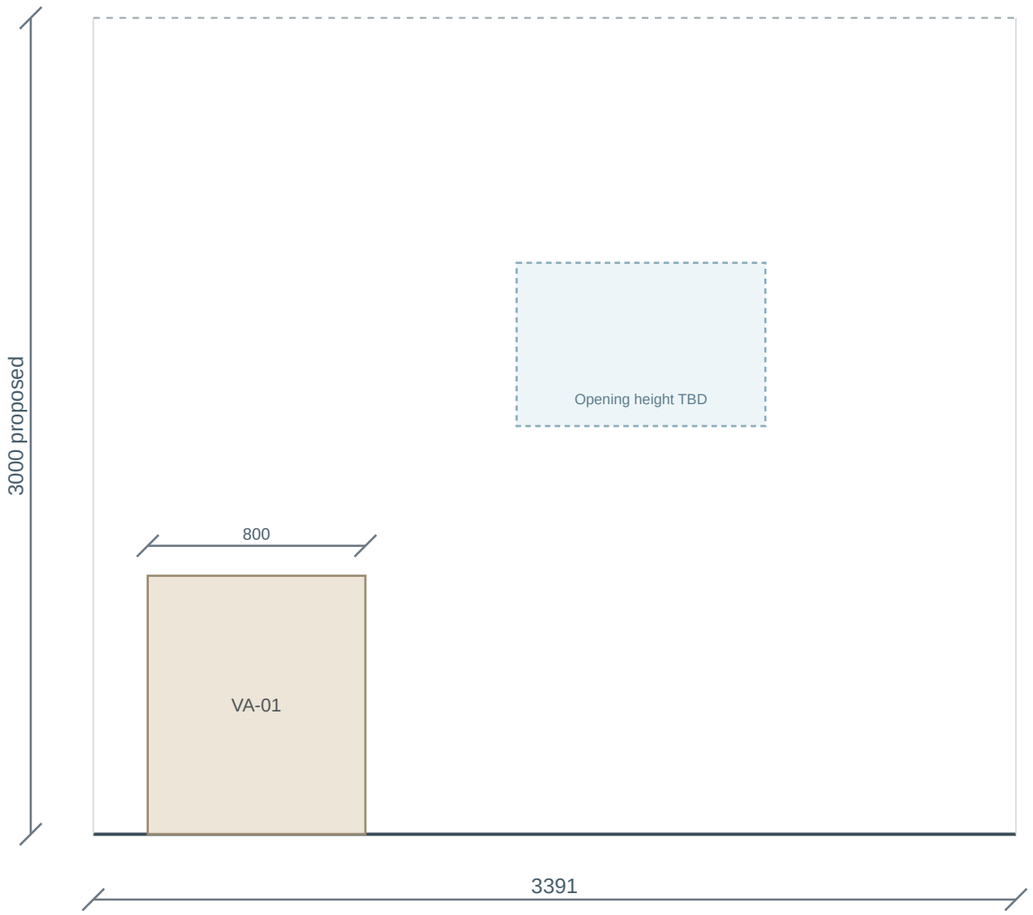

Horizontal: plan Y axis · vertical: proposed heights above finished floor

ENVELOPE ONLY / NO CUT-OUTS, HARDWARE OR FABRICATION RELEASE

Envelope projections only. Clear height 3000 mm, opening heights and all furniture heights are proposals. Manufacturer cut-outs, panel build-ups, fixings and hardware are not issued. Final joinery sizes follow shell measurement, hardware selection and a signed workshop drawing.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Bathroom / vanity envelope**	**DD–04 / 12 OCT 2026**	**J-303 / mm · NTS**

Furniture & joinery schedule / 1

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

CODE / ROOM / ITEM	QTY	PLAN X × Y × H, MM	FINISH	ORDER CONDITION
SO-01 · **Family sofa** Living & dining	1	850 × 2100 × 800	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
CT-01 · **Rounded coffee table** Living & dining	1	650 × 1000 × 400	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
TV-01 · **TV console** Living & dining	1	320 × 1100 × 450	J01	Proposed envelope Compact console stays within the PDF stair-side wall span. Confirm the TV size, eye level, sockets and seated viewing distance.
DT-01 · **Six-seat dining table** Living & dining	1	850 × 1500 × 750	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-01 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-02 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-03 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-04 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-05 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
DCH-06 · **Dining chair** Living & dining	1	430 × 430 × 820	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
SO-02 · **Guest sofa** Drawing room	1	820 × 1850 × 800	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
CT-02 · **Coffee table** Drawing room	1	600 × 900 × 400	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
AC-01 · **Occasional chair** Drawing room	1	650 × 700 × 820	T02	Proposed envelope Proposed size; confirm product and clearances before ordering
AC-02 · **Occasional chair** Drawing room	1	650 × 700 × 820	T02	Proposed envelope Proposed size; confirm product and clearances before ordering

Design reservations only. Verify products and shell before orders. Plan X/Y/H dimensions are not manufacturer cut-outs. Two cots are included but unplaced.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Furniture & joinery schedule / 1**	**DD–04 / 12 OCT 2026**	**S-101 / mm · NTS**

Furniture & joinery schedule / 2

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

CODE / ROOM / ITEM	QTY	PLAN X × Y × H, MM	FINISH	ORDER CONDITION
KB-01 · **Front base-cabinet run** **Kitchen**	1	1838 × 600 × 900	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
KB-02 · **Right base-cabinet run** **Kitchen**	1	600 × 1453 × 900	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
FR-01 · **Refrigerator reservation** **Kitchen**	1	600 × 650 × 1800	C01	Proposed envelope Proposed size; confirm product and clearances before ordering
SK-01 · **Sink reservation** **Kitchen**	1	550 × 430 × 200	M01	Proposed envelope Illustrative 200 mm bowl depth; proposed worktop level 900 mm, bowl underside 700 mm. Confirm sink product, landing space and cut-outs.
KU-01 · **Above-fridge cabinet** **Kitchen**	1	600 × 350 × 600	J02	Proposed envelope Proposed underside 2000 mm above finished floor; confirm fridge ventilation and access. No cupboard is placed across KW.
KU-02 · **Front upper-cabinet run** **Kitchen**	1	1400 × 330 × 750	J02	Proposed envelope Ivory upper cabinets proposed on the solid wall left of KW. Underside 1550 mm, top 2300 mm; confirm worktop reach and cabinet hardware. The opening starts at local x=1524 mm; the cabinet ends at 1430 mm.
GH-01 · **Fixed three-burner gas hob reservation** **Kitchen**	1	500 × 650 × 85	M01	Proposed envelope Generic 650 × 500 mm surface reservation, with controls facing the aisle; NOT a cut-out size or selected product. Confirm orientation, heat clearances, stone edge distances, gas access and separation from induction before fabrication.
IH-01 · **Fixed single-zone induction reservation** **Kitchen**	1	300 × 300 × 15	M01	Proposed envelope Generic 300 × 300 mm glass-top reservation; NOT a cut-out size or selected product. 190 mm gap to the gas reservation is a proposed fit, not a certified minimum. Confirm under-counter ventilation, circuit, cookware space and manufacturer gas-adjacency rules.
EX-01 · **Cooking-run extractor reservation** **Kitchen**	1	500 × 1200 × 1150	M01	Proposed envelope Proposed 1200 mm-wide extraction envelope across both cooking reservations, lower edge 1800 mm above floor. Actual hood, installation height above gas supports, capture, duct route and discharge must be designed to appliance instructions; no airflow rating selected.
PJ-01 · **Altar cabinet** **Puja**	1	1000 × 350 × 650	S01	Proposed envelope Proposed size; confirm product and clearances before ordering
BED-02 · **Six-foot parent bed / frame reservation** **Family bedroom**	1	2100 × 1900 × 1130	J01	Proposed envelope 6-foot nominal bed width confirmed. Proposed overall frame allowance 1900 wide × 2100 long × 1130 high mm, not selected product dimensions; mattress length and frame details pending. Approximately 1052 mm remains to the lower room face in this arrangement; circulation and both cots are unresolved. The frame is shifted toward the rear to clear the PDF family-entry span; door swing and both cot positions still require coordination.
BT-03 · **Compact bedside table** **Family bedroom**	1	400 × 360 × 500	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
COT-01 · **Separate infant cots + matched mattresses** **Family bedroom**	2	700 × 1300 × 1100	J01	Placement on hold Location held: confirm outer product size, safe distance from windows/cords, caregiver access and both access routes. No loose bedding. Not a fabrication specification.
BED-01 · **Grandparents' bed** **Grandparents' bedroom**	1	2032 × 1524 × 1130	J01	Proposed envelope Illustrative overall size includes 1130 mm headboard; mattress top about 520 mm. Final product and bed width pending.

Design reservations only. Verify products and shell before orders. Plan X/Y/H dimensions are not manufacturer cut-outs. Two cots are included but unplaced.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Furniture & joinery schedule / 2**	**DD–04 / 12 OCT 2026**	**S-102 / mm · NTS**

Furniture & joinery schedule / 3

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

CODE / ROOM / ITEM	QTY	PLAN X × Y × H, MM	FINISH	ORDER CONDITION
BT-01 · **Bedside table** **Grandparents' bedroom**	1	400 × 380 × 500	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
BT-02 · **Bedside table** **Grandparents' bedroom**	1	400 × 380 × 500	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
CH-01 · **Shallow chest** **Grandparents' bedroom**	1	400 × 1100 × 1000	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
WR-01 · **Rear-wall wardrobe** **Dressing**	1	1600 × 600 × 2400	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
MR-01 · **Wall mirror** **Dressing**	1	20 × 600 × 1300	M01	Proposed envelope Mirror is 1300 mm high; proposed lower edge 700 mm above finished floor. Confirm reach and reflections.
VA-01 · **Wall-mounted vanity** **Bathroom**	1	450 × 800 × 950	J01	Proposed envelope Cabinet and basin reservation, approximately 950 mm to basin rim in the model. Mirror position is illustrative; confirm product sizes and user reach.
WC-01 · **WC reservation** **Bathroom**	1	680 × 400 × 750	C01	Proposed envelope Proposed size; confirm product and clearances before ordering
SW-01 · **Shower zone** **Bathroom**	1	1636 × 900 × 2100	F02	Proposed envelope Proposed size; confirm product and clearances before ordering
DS-01 · **Desk** **Study**	1	1200 × 550 × 740	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
DC-01 · **Task chair** **Study**	1	480 × 480 × 850	T01	Proposed envelope Proposed size; confirm product and clearances before ordering
SH-01 · **Shallow wall shelf** **Study**	1	1200 × 220 × 35	J01	Proposed envelope Shelf thickness 35 mm; proposed underside 1600 mm above finished floor. Confirm fixings and reach.
ST-01 · **Side shelving** **Store**	1	400 × 1450 × 2100	J01	Proposed envelope Proposed size; confirm product and clearances before ordering
ST-02 · **Rear shelving** **Store**	1	1830 × 400 × 2100	J01	Proposed envelope Proposed size; confirm product and clearances before ordering

Design reservations only. Verify products and shell before orders. Plan X/Y/H dimensions are not manufacturer cut-outs. Two cots are included but unplaced.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Furniture & joinery schedule / 3**	**DD–04 / 12 OCT 2026**	**S-103 / mm · NTS**

Finishes / 1

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

CODE	FINISH	APPLICATION	SPECIFICATION	SAMPLE / MAINTENANCE
P01	Warm ivory	Main interior walls	Low-sheen washable paint; approve an actual sample on a dry, prepared wall.	Wipe gently; fix moisture before repainting.
P02	Chalk white	Ceilings	Matt ceiling finish. Plain ceiling is the default; no invented beam concealment.	Keep access to drivers and service points.
F01	Soft stone	Dry-area floors	Matte porcelain proposal. Select slip performance, module and grout from samples; no quantity until the shell is checked.	Neutral cleaner; protect edges during fit-out.
F02	Wet-area stone	Bathroom floor	Wet slip performance and drain slopes to be specified as a system. Colour alone does not establish safety.	Clean soap residue; inspect grout and seals.
J01	Pale oak	Dry joinery	Oak-tone laminate or veneer proposal. Confirm core grade, emissions, edges, hardware and warranty.	Dry-wipe edges; avoid standing water.
J02	Ivory wet-zone joinery	Kitchen + vanity	Moisture-appropriate documented board grade, sealed cuts, raised or protected base and service access. Approve supplier specification.	Ventilate and repair leaks promptly.
S01	Light mineral surface	Counter + altar	Light stone family; choose the actual surface after stain, heat and cleaning demonstrations. No brand or performance assumed.	Use heat trivets and product-specific cleaning.
T01	Oatmeal textile	Sofas + headboards	Removable washable or documented easy-clean upholstery, tested on a physical sample.	Vacuum and follow the fabric label.
T02	Muted sage	Limited textile accents	Small accents keep the palette light. Match in daylight and under the selected lamps.	Check colourfastness before wet cleaning.
M01	Brushed metal	Fittings + mirror details	Consistent finish with documented wet-area suitability where needed.	Avoid abrasive pads.

No manufacturer, shade number, measured finish area or order quantity is approved. Approve physical samples before procurement.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Finishes / 1**	**DD–04 / 12 OCT 2026**	**S-201 / mm · NTS**

Finishes / 2

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

CODE	FINISH	APPLICATION	SPECIFICATION	SAMPLE / MAINTENANCE
C01	Soft white	Appliances + sanitaryware	Appliance and fixture sizes remain product reservations, not endorsed selections.	Follow manufacturer instructions.

No manufacturer, shade number, measured finish area or order quantity is approved. Approve physical samples before procurement.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Finishes / 2**	**DD–04 / 12 OCT 2026**	**S-202 / mm · NTS**

Opening spans / 1

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REFERENCE	SOURCE SPAN, MM	VERTICAL LEVEL	TYPE / SOURCE NOTE	ORDER STATUS
W-01	1829	Not supplied	W1 / grandparents	Verify rough opening, frame, sill/head and glazing.
W-02	914	Not supplied	V / study	Verify rough opening, frame, sill/head and glazing.
W-03	1677	Not supplied	W1 / family	Verify rough opening, frame, sill/head and glazing.
W-04	1016	Not supplied	Bedroom to side opening	Verify rough opening, frame, sill/head and glazing.
W-05	1829	Not supplied	Living side window	Verify rough opening, frame, sill/head and glazing.
W-06	914	Not supplied	Bathroom side window	Verify rough opening, frame, sill/head and glazing.
W-07	1825	Not supplied	W / drawing	Verify rough opening, frame, sill/head and glazing.
W-08	915	Not supplied	KW / kitchen	Verify rough opening, frame, sill/head and glazing.
W-09	1228	Not supplied	Stair front opening	Verify rough opening, frame, sill/head and glazing.
O-01	819	Not supplied	D2; swing not shown	Verify opening, frame and swing.
O-02	1164	Not supplied	Bedroom to dressing; open connection drawn	Verify opening, frame and swing.
O-03	738	Not supplied	D2; retained via dressing	Verify opening, frame and swing.
O-04	1088	Not supplied	D; retained at the family-bedroom side	Verify opening, frame and swing.

13 recorded source spans only. This is not the complete door/window schedule: several access gaps lack individual source dimensions. Vertical dimensions are deliberately not taken from render assumptions.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Opening spans / 1**	**DD–04 / 12 OCT 2026**	**S-301 / mm · NTS**

Service brief / 1

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REFERENCE	ROOM / ITEM	REQUIRED PROVISION	BEFORE ROUGH-IN
KS01	Kitchen / Three-burner gas hob / LPG cylinder	LPG cylinder supply, accessible isolation and ventilation	LPG cylinder confirmed by owner. Cylinder location, approved regulator/connection, routing, ventilation and commissioning require the gas installer and selected hob manual. No cylinder location is approved.
KS02	Kitchen / Single-zone fixed induction	Electrical supply and under-counter ventilation	Selected nameplate load, dedicated supply/protection requirements, isolation and drawer clearances.
KS03	Kitchen / Sink and filtered water	Water supply, accessible shut-off and trapped waste	Sink/tap dimensions, filter product, waste route and final wall/floor service entries.
KS04	Kitchen / Refrigerator	Power and product ventilation space	Actual fridge size, plug access, door swing and manufacturer side/top/rear clearances.
KS05	Kitchen / Extractor	Power and duct to an approved outdoor outlet	Hood product, installation height, coverage of both units, duct losses, access and building opening approval.
KS06	Kitchen / Small-appliance work area	Accessible countertop outlets	Your appliance list and simultaneous loads; socket location clear of heat and water, confirmed by electrical designer.

Brief for specialist coordination. Socket heights, circuits, pipe routes, drain falls and penetrations remain unissued.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Service brief / 1**	**DD–04 / 12 OCT 2026**	**S-401 / mm · NTS**

Service brief / 2

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REFERENCE	ROOM / ITEM	REQUIRED PROVISION	BEFORE ROUGH-IN
BS01	Bathroom / WC	Water isolation, soil connection and vent coordination	Chosen pan/cistern, floor or wall outlet, rough-in and maintenance access; no outlet dimension assumed.
BS02	Bathroom / Vanity	Water, waste and mirror-light provision	Chosen basin/tap, trap clearance, storage conflict and electrical wet-zone assessment.
BS03	Bathroom / Shower	Hot/cold supply, mixer, drain and waterproofing	Mixer manual, waterproofing/threshold detail, floor falls, drain outlet and water test sequence.
BS04	Bathroom / Electric geyser and ventilation	Electric geyser confirmed; hot water, power and service access	Capacity, selected product, mounting support, nameplate load, protection/isolation, pressure relief discharge and maintenance access require electrical/plumbing coordination. Location and ventilation details are not approved.
MS-bed-main	Family bedroom / Bedroom AC	One AC for this room, confirmed by owner	Heat-load calculation, equipment type/capacity, power, drain, refrigerant route and outdoor unit; avoid infant sleep positions.
ES-bed-main	Family bedroom / Bedside and room controls	Accessible switching, charging and night-route light	Final bed/cot layout, switch reach, cord management, fan/light coordination and circuit design.

Brief for specialist coordination. Socket heights, circuits, pipe routes, drain falls and penetrations remain unissued.

Service brief / 3

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REFERENCE	ROOM / ITEM	REQUIRED PROVISION	BEFORE ROUGH-IN
MS-bed-left	Grandparents' bedroom / Bedroom AC	One AC for this room, confirmed by owner	Heat-load calculation, equipment type/capacity, power, drain, refrigerant route and outdoor unit; avoid infant sleep positions.
ES-bed-left	Grandparents' bedroom / Bedside and room controls	Accessible switching, charging and night-route light	Final bed/cot layout, switch reach, cord management, fan/light coordination and circuit design.
LS01	Living & dining / TV and seating	Power, data and accessible cable route	TV dimensions, furniture positions and socket heights; no AC requested.
LS02	Living & dining / Dining and general comfort	Separate pendant/general controls and fan provision	Occupied-chair clearances, fan sweep and pendant height; ceiling structure is unconfirmed.
DS01	Drawing room / Guest seating	General sockets, fan/light controls; optional TV/data	Confirm whether a second TV is wanted and coordinate curtain/fan clearances; no AC requested.
SS01	Study / Desk	Task light, power and data	Actual computer/charging equipment, outlet reach and ventilation; verify the source depth conflict.

Brief for specialist coordination. Socket heights, circuits, pipe routes, drain falls and penetrations remain unissued.

Service brief / 4

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REFERENCE	ROOM / ITEM	REQUIRED PROVISION	BEFORE ROUGH-IN
WS01	Dressing / Wardrobe and mirror	Mirror light and accessible drivers	Wardrobe divisions, mirror positions and door access to bathroom; maintenance access.
PS01	Puja / Altar	Protected accent lighting with accessible driver	Confirm flame/incense use, heat separation and ventilation before upper shelves or wiring.
ST01	Store / Storage	General light and accessible control	Resolve room depth first; confirm stored items and any appliance loads.
SC01	Staircase / Future stair	Continuous lighting and switching intent	Floor-to-floor levels, stair section, headroom, guardrail and final step arrangement from architect/engineer.

Brief for specialist coordination. Socket heights, circuits, pipe routes, drain falls and penetrations remain unissued.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Service brief / 4**	**DD–04 / 12 OCT 2026**	**S-404 / mm · NTS**

Technical requests / 1

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REQUEST / SCOPE	RESPONSIBLE PARTY / TIMING	REQUIRED ANSWER OR DRAWING	BASIS
R01 · Record measured plinth and wall set-out **Whole house**	Architect / site surveyor Before walls and service sleeves	A dimensioned site check, diagonals, wall faces and the exact drawing revision used on site.	The owner confirms the built plinth matches this PDF. A measured site record is still needed to reconcile the drawing conflicts.
R02 · Confirm levels, columns and beams **Whole house**	Architect + structural engineer Before wall and slab work	Coordinated structural plans, finished floor levels, beam depths, clear ceiling height and future-floor stair section.	The user reports an engineered foundation, but the drawings have not been supplied. No columns or beam penetrations may be inferred from this interior plan.
D01 · Resolve the store depth conflict **Store**	Architect Before setting out the store walls	Confirm whether the 2438 mm printed depth or approximately 2057 mm drawn depth is intended; issue a revised drawing.	Difference is approximately 381 mm. The website preserves the drawn footprint.
D02 · Resolve the study depth conflict **Study**	Architect Before setting out the study walls	Confirm the 2057 mm printed depth against the approximately 2108 mm drawn depth.	Do not stretch the model or order a desk from the conflicting labels.

Open technical requests. Local follow-up responses must be exported separately; receipt of a reply is not approval.

PROJECT	DRAWING	ISSUE / DATE	SHEET / UNITS
JAMMU HOUSE / INTERIORS	**Technical requests / 1**	**DD–04 / 12 OCT 2026**	**R-001 / mm · NTS**

Technical requests / 2

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REQUEST / SCOPE	RESPONSIBLE PARTY / TIMING	REQUIRED ANSWER OR DRAWING	BASIS
D03 · Resolve the living-room width conflict **Living & dining**	Architect Before setting out internal walls	Confirm the 5715 mm printed width against the approximately 5752 mm drawn width.	The rounded drawing comparison is not a site measurement.
R03 · Issue a complete opening schedule **Whole house**	Architect + window / door supplier Before door and window openings are built	Rough openings, frames, shutter sizes, sill/head levels, swings, ventilation and safety glazing where applicable.	The source has opening spans but no complete door/window height or swing schedule.
K01 · Select both fixed cooking appliances **Kitchen**	Owner + kitchen supplier + installers Before electrical rough-in and worktop cutting	Exact three-burner gas hob and single-zone induction manuals, cut-outs, edge clearances, under-counter ventilation and service access.	The 190 mm illustrated separation and extractor reservation are proposals, not manufacturer-approved installation dimensions.
K02 · Coordinate gas and external extraction **Kitchen**	Gas installer + kitchen supplier + architect Before service sleeves and cabinets	Gas source and accessible isolation, tested supply route, selected hood coverage, duct route and an allowed outdoor termination.	No cylinder position, gas pipe size, duct diameter or penetration through structure has been designed.

Open technical requests. Local follow-up responses must be exported separately; receipt of a reply is not approval.

Technical requests / 3

Jammu House · Ground floor · BANSI VERMA_010920.pdf, page 1

DESIGN DEVELOPMENT · NOT FOR CONSTRUCTION

REQUEST / SCOPE	RESPONSIBLE PARTY / TIMING	REQUIRED ANSWER OR DRAWING	BASIS
F01 · Prove the six-foot bed and two-cot arrangement **Family bedroom**	Owner + interior designer Before bedroom joinery and sockets	Chosen overall six-foot bed frame and both cot products; a measured layout retaining the dressing and store routes, caregiver access and separation from cords/windows.	Two cots are in purchase scope but are not placed or approved. Six-foot width is confirmed. The proposed 1900 × 2100 mm frame leaves about 1052 mm to the lower room face and 1500 mm at the foot; safe circulation is unresolved.
E01 · Issue coordinated electrical drawings **Whole house**	Qualified electrical designer / electrician Before wiring and plaster	Appliance loads, board/circuits, protective devices, earthing, outlet and switch set-out, fan clearances, AC services and test requirements.	Lighting dots are intent only. They do not specify wiring, circuit ratings, cable sizes or installation heights.
P01 · Coordinate wet-area levels and plumbing **Bathroom**	Architect + plumbing / waterproofing installers Before pipework and floor build-up	Selected sanitaryware and electric-geyser rough-ins, supply/waste/vent routes, pressure-relief discharge, drain positions, falls, finished levels, waterproofing system, thresholds and test method.	Fixture envelopes are proposals. Drainage and waterproofing construction details are not supplied.
J01 · Approve measured joinery shop drawings **Whole house**	Interior designer + joinery supplier After shell measurement; before manufacture	Carcass/panel specifications, actual widths, clearances, hardware, hinges, drawer and door divisions, fixings, cut-outs and maintenance access.	The elevations in this issue show design envelopes, not cutting lists or fabrication approval.

Open technical requests. Local follow-up responses must be exported separately; receipt of a reply is not approval.