
YOUR FAMILY / YOUR PLAN / YOUR HOME

The interior of your everyday.

Eleven indoor spaces. A warm ivory, pale oak and soft stone palette. Room plans, furniture reservations, material and lighting intent, and the decisions still to settle.

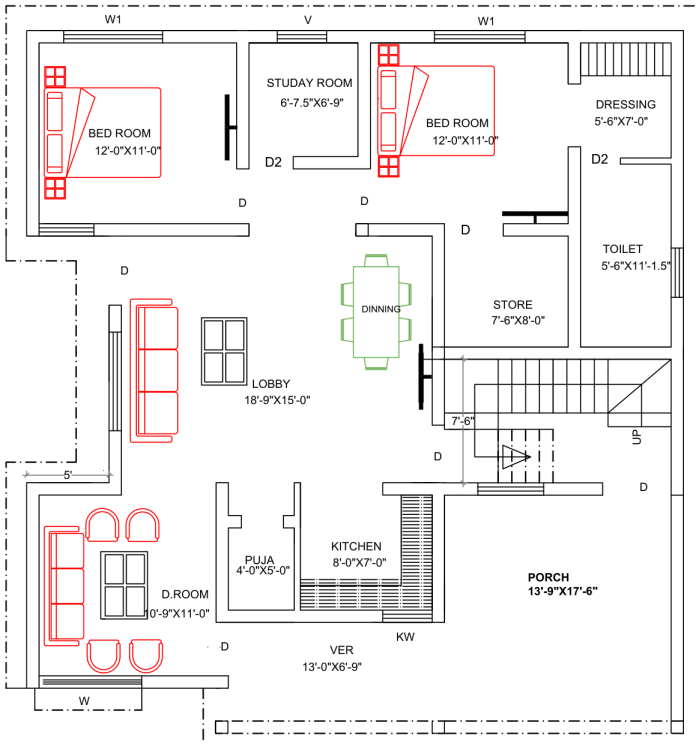


Source: BANSI VERMA_010920.pdf · page 1. Parents and two babies in the family bedroom; grandparents in the other bedroom. Kitchen, puja and bathroom access retained.

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

01 / Living & dining

18′9″ × 15′ · printed PDF label · diagram dimensions are the scaled PDF footprint

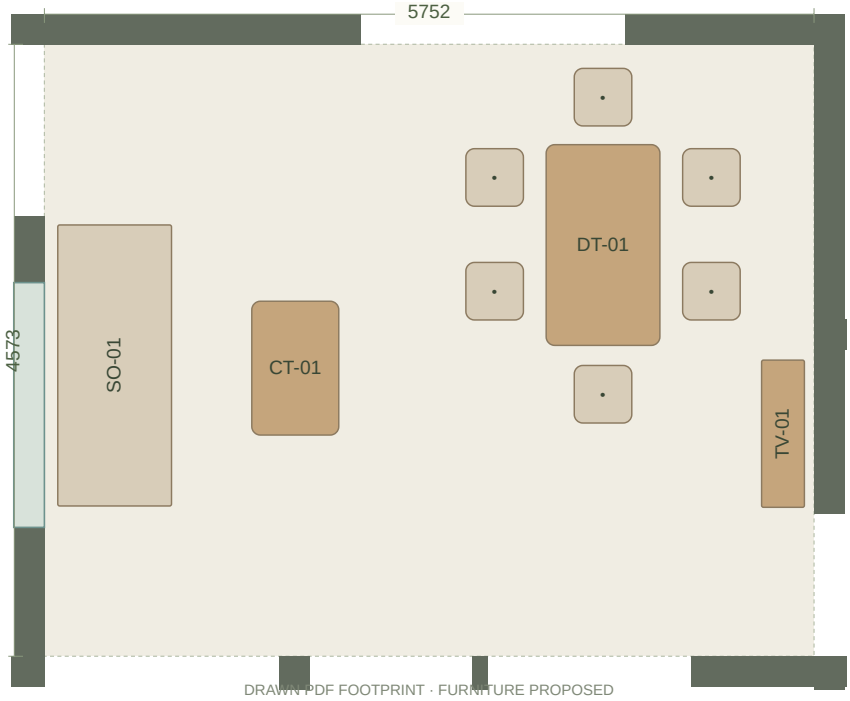

Layout & finishes

Ivory walls, light stone floor, oak furniture and sage textiles.

- 2100 mm sofa along the NE-side inner wall.
- 1500 × 850 mm dining table for four to six; confirm occupied-chair clearances.
- Low TV console at stair-side wall; keep the route to every room open.

Light & services

3000 K ambient and dining pendant on separate dimmers.

No AC requested here. Provide fan points with locations and quantities coordinated to room geometry, pendant lights and dining/seating. Preserve TV/data conduits and seating-area sockets.


Finish codes: P01 · P02 · F01 · J01 · T01

D03 / Living width needs checking

The label says 18 feet 9 inches (5715 mm); the inner wall faces scale to about 5752 mm. Reconcile this roughly 37 mm difference before flooring or joinery quantities.

02 / Drawing room

10′9″ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

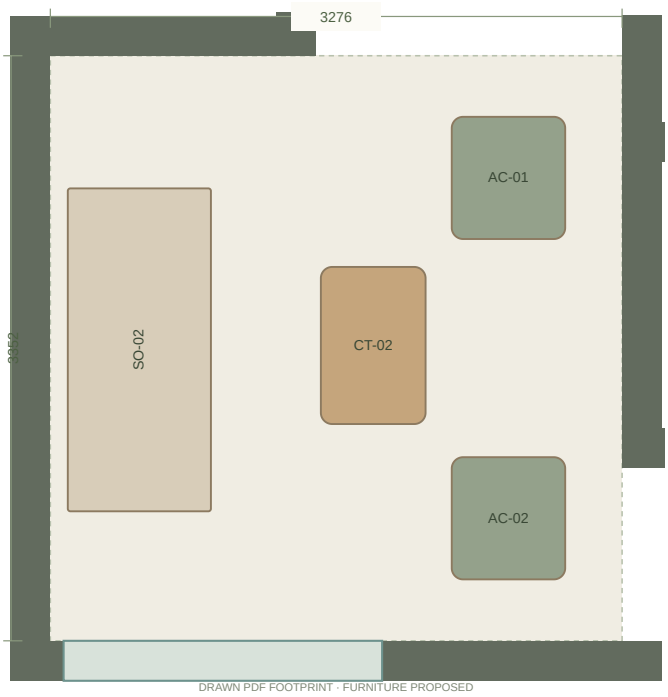

Layout & finishes

Ivory walls, oatmeal sofa, light oak and one sage chair.

- Compact 1800–2100 mm sofa, two occasional seats if clearances permit.
- Rounded coffee table and low console; avoid bulky corner sofas.
- Sheer plus blackout curtains at the SE front window.

Light & services

3000 K layered light; one floor lamp rather than a heavy false ceiling.


No AC requested here. Provide a ceiling fan point, general sockets and TV/data provision if needed; keep fan sweep clear of lights and curtains.

Finish codes: P01 · P02 · F01 · J01 · T01 · T02

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

03 / Kitchen

8′ × 7′ · printed PDF label · diagram dimensions are the scaled PDF footprint

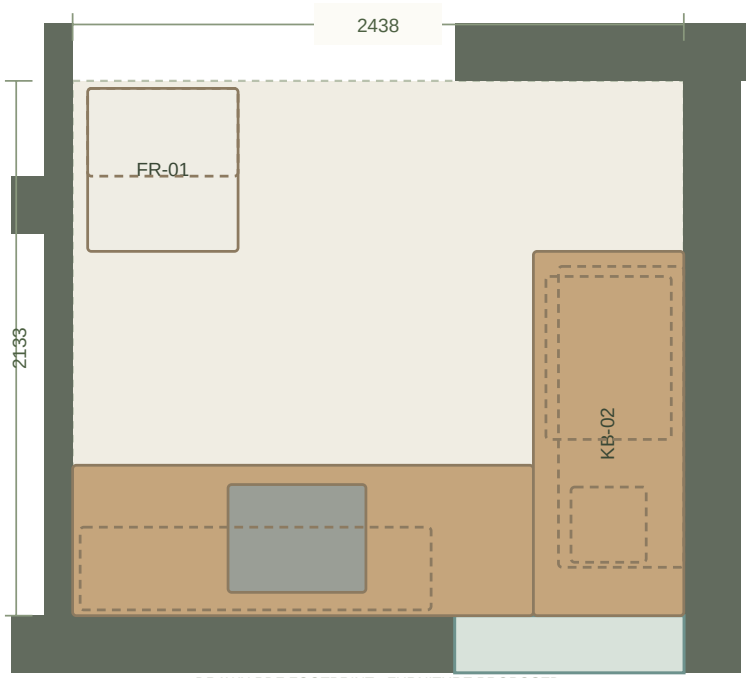

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Ivory wall-cabinet front, pale oak base fronts and a light stone worktop.

- L-shaped 600 mm-deep counters for one main cook; no island.
- A fixed three-burner gas hob and a separate fixed single-zone induction unit on the right counter; sink on the front counter. The two product reservations have 190 mm between them, subject to manufacturer approval.
- A 600 × 650 mm refrigerator reservation at the left of the entrance leaves about 1178 mm to the opposite counter; door opening, ventilation and appliance cut-outs remain to be checked.
- A 1400 mm ivory upper-cabinet run on the solid front wall, with a proposed 650 mm gap above the 900 mm worktop; it stops before KW.

Light & services

4000 K under-cabinet task strips plus a ceiling light.


For one main cook, with BOTH cooking units fixed in the counter: three gas burners and one induction zone. Coordinate gas supply/isolation, induction circuit and ventilation beneath the unit, sink/waste, filtered water, fridge and externally ducted extraction. Circuit ratings, duct size and gas route require chosen product instructions. Place accessible isolation outside hot/wet zones; do not discharge the hood into another room.

Finish codes: P01 · F01 · J02 · S01 · M01 · J01 · C01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

04 / Puja

4′ × 5′ · printed PDF label · diagram dimensions are the scaled PDF footprint

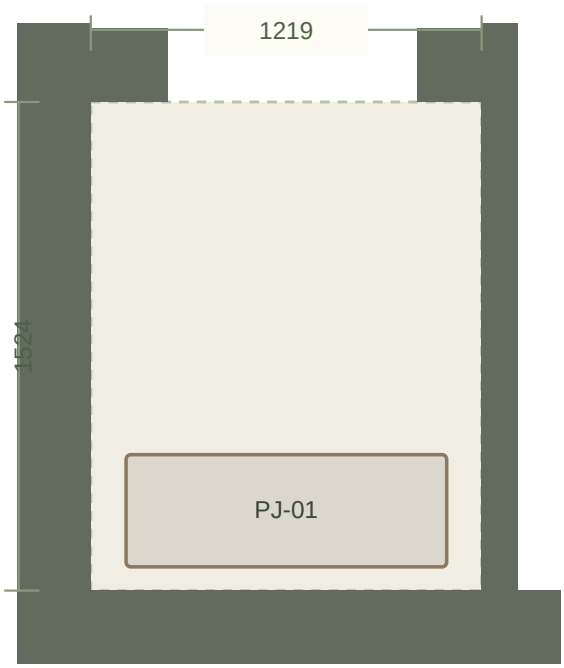

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Warm ivory, a light stone altar and an oak shelf.

- Shallow altar shelf against back wall, with closed lower storage.
- Keep the opening and floor clear for seated use.
- Use a heat-safe tray and ventilation if using a flame.

Light & services

2700–3000 K concealed light with accessible driver.


One protected light circuit; no loose wiring beside lamps or incense.

Finish codes: P01 · P02 · F01 · J01 · S01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

05 / Family bedroom

12′ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

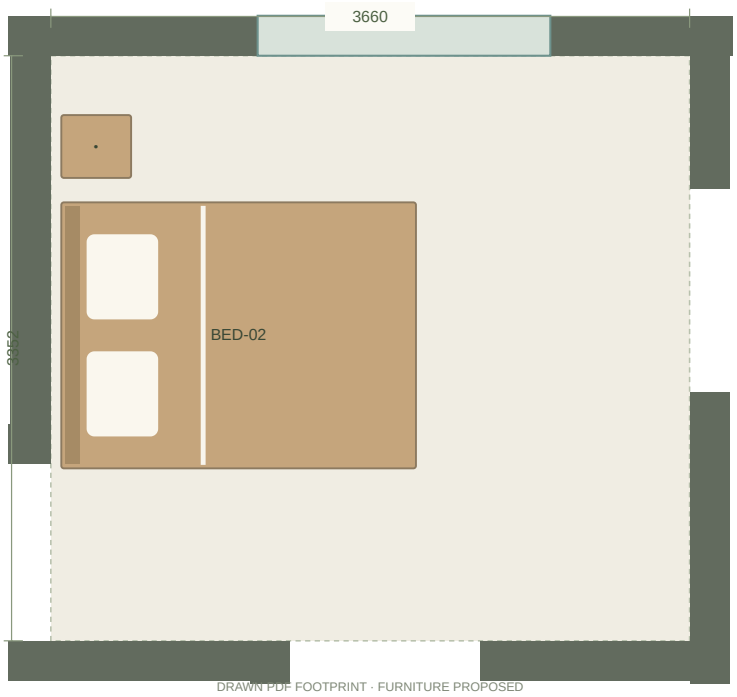

Layout & finishes

Warm ivory, pale oak and a textured stone-colour headboard.

- 1524 × 2032 mm parent bed proposal, retaining the PDF headboard direction. Final bed width is awaiting your choice.
- Two separate baby cots are included in the item list, but their positions are held for a measured fit check. The previous side-wall placement obstructed the dressing route.
- Keep dressing and store access open. No cot is shown as approved in the 3D room; product dimensions and safe placement must be resolved first.

Light & services

3000 K dimmable light; low-level night light toward bathroom.

AC confirmed for the parents' and babies' bedroom. Choose unit position and adjustable airflow to avoid direct draughts at both cots. Coordinate a dedicated circuit, outdoor heat rejection and condensate drainage; type and load-based capacity remain pending.


Finish codes: P01 · P02 · F01 · J01 · T01

F01 / Two-cot layout is still a fit study

The room also carries the dressing and store routes. Cot footprints are reservation blocks, not approved products. Rear-window separation, curtain cords, door swings and caregiver access must be resolved before either cot position is approved.

06 / Grandparents' bedroom

12′ × 11′ · printed PDF label · diagram dimensions are the scaled PDF footprint

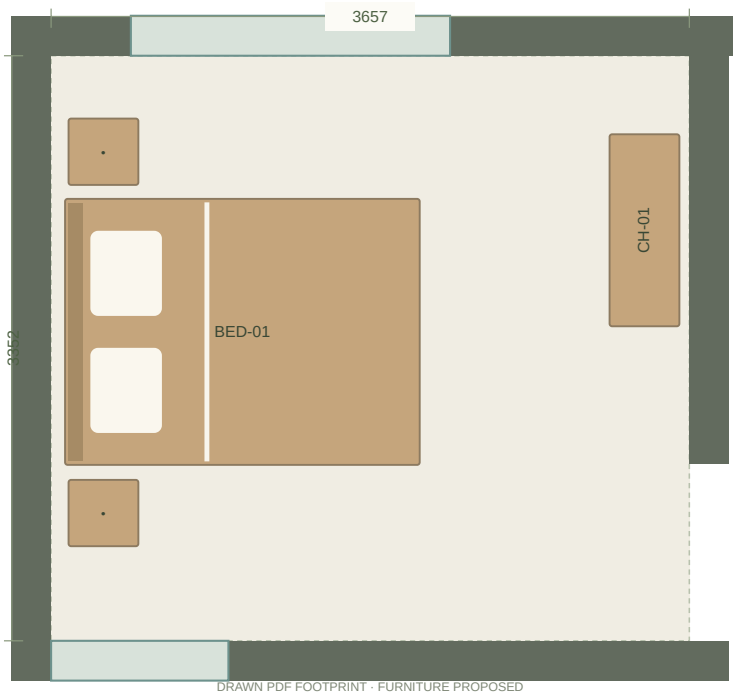

Layout & finishes

Warm ivory walls, a soft sage headboard and pale oak bedside tables.

- 1524 × 2032 mm bed proposal, retaining the west-side headboard direction shown in the PDF.
- Two compact bedside tables; no loose rug on the night route.
- A shallow chest for daily clothing. Full hanging storage is in the shared dressing area; wardrobe allocation is still to be agreed.

Light & services


3000 K dimmable ceiling light; reading lamps with separate switches.

AC confirmed for this bedroom: dedicated circuit and protection sized by the electrician; equipment type and capacity pending. Coordinate power, outdoor heat rejection and condensate drainage before plaster. Keep bedside sockets and switches convenient.

Finish codes: P01 · P02 · F01 · J01 · T02

07 / Dressing

5′6″ × 7′ · printed PDF label · diagram dimensions are the scaled PDF footprint

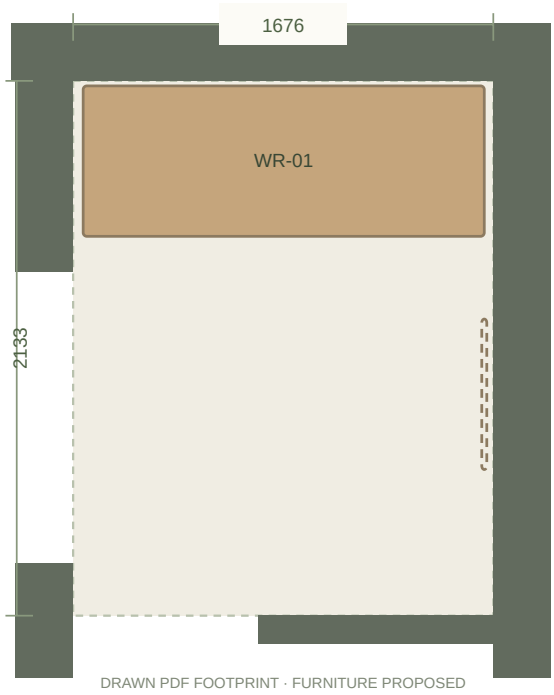

Layout & finishes

Ivory cabinet fronts, light oak handles and a full-height mirror.

- One 600 mm-deep wardrobe run against the rear wall, where storage hatching appears in the PDF.
- Clear central route from the family bedroom to the bathroom; do not place cabinets beside both doorways.
- Sliding fronts proposed; internal hanging, drawer and loft allocation still to be agreed.

Light & services

3500–4000 K vertical mirror light, CRI 90 or higher.


One grooming socket outside wet zone; ventilate enclosed cupboards.

Finish codes: P01 · P02 · F01 · J01 · M01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

08 / Bathroom

5′6″ × 11′1½″ · printed PDF label · diagram dimensions are the scaled PDF footprint

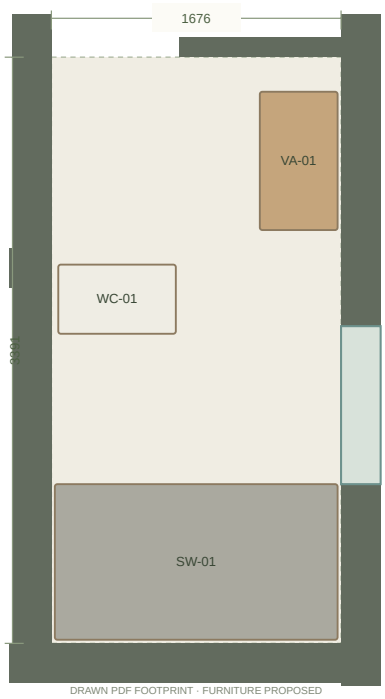

Layout & finishes

Warm stone slip-resistant tile, ivory ceiling and brushed stainless fittings.

- 800 × 450 mm vanity near the dressing entry, WC in the middle and a 900 mm-deep shower zone at the far end.
- Wet/dry division is proposed; screen opening, drain, waterproofing build-up and fixture clearances need a coordinated bathroom drawing.
- Bathroom access remains exactly via the dressing area; no new common doorway is introduced.

Light & services

4000 K mirror task lighting; wet-area rated fixtures chosen by installer.


Provide bathroom exhaust to a confirmed outdoor discharge point, with a roof route considered if the side gap is obstructed; do not exhaust into an enclosed gap or another room. Coordinate duct, geyser circuit, earthing and wet-area fittings before construction.

Finish codes: P02 · F02 · J02 · S01 · M01 · J01 · C01

PDF-derived horizontal footprint · proposed furniture, finishes and heights · not for construction or fabrication. Confirm dimensions at the shell and obtain coordinated technical drawings.

09 / Study

6′7½″ × 6′9″ · printed PDF label · diagram dimensions are the scaled PDF footprint

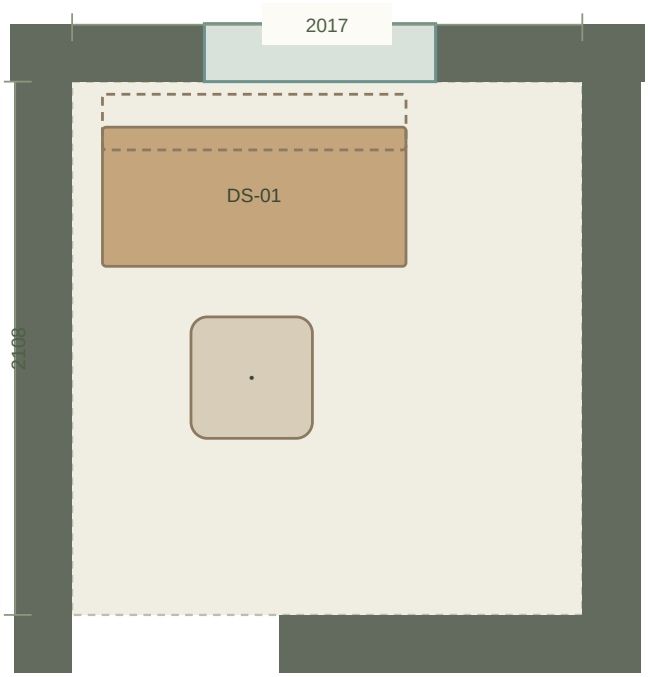

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Ivory, light oak desk and a small sage pinboard.

- 1200 × 550 mm desk with one chair and a shallow shelf.
- Keep the D2 entry clear. The PDF labels the rear opening V; a full-height picture window is not assumed.
- The printed depth differs from the vector drawing by about 50 mm; check before desk fabrication.

Light & services

4000 K desk light, 3000 K ambient; control glare on screens.

Desk sockets, data conduit and router route before plaster.


Finish codes: P01 · P02 · F01 · J01 · T01

D02 / Study depth needs checking

The label says 6 feet 9 inches (2057 mm); the vector depth is about 2108 mm. Verify the roughly 50 mm difference at the shell.

10 / Store

7′6″ × 8′ · printed PDF label · diagram dimensions are the scaled PDF footprint

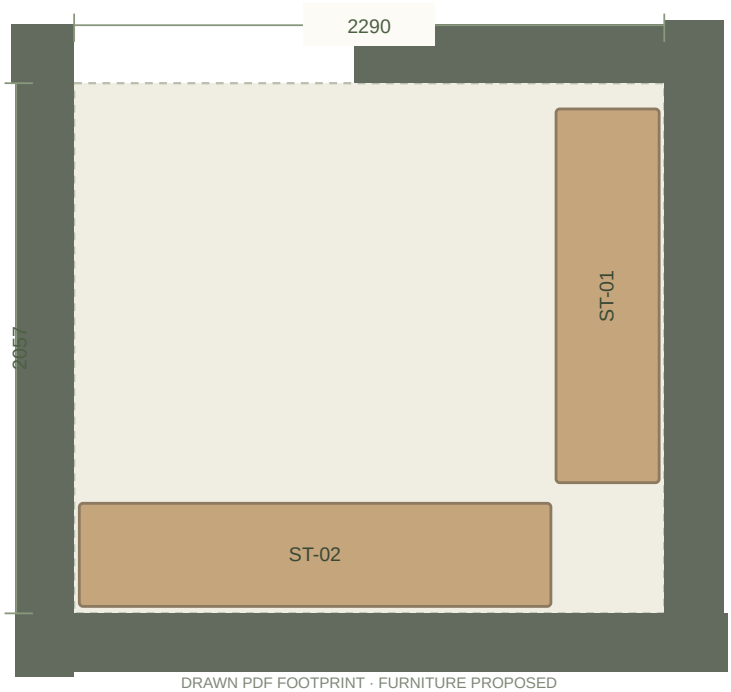

DRAWN PDF FOOTPRINT · FURNITURE PROPOSED

Layout & finishes

Washable ivory walls and modular oak-tone shelving.

- Two 400 mm-deep shelf runs proposed along the side and rear.
- Use the smaller drawn depth for this fit study, keeping the doorway open.
- The 8-foot label disagrees with the drawn 6-foot-9-inch depth. No shelf order until the architect resolves it.

Light & services

3500–4000 K bright ceiling light.

One general socket and provision for future utility needs after plumbing review.


Finish codes: P01 · P02 · F01 · J01

D01 / Store depth does not agree

The PDF label says 8 feet (2438 mm). Its vector wall faces scale to about 2057 mm (6 feet 9 inches): a difference of about 381 mm. The model follows the drawn walls; obtain architect confirmation before shelves are ordered.

11 / Staircase

7′6″ dimension shown; not a tread or rise schedule · printed PDF label · diagram dimensions are the scaled PDF footprint

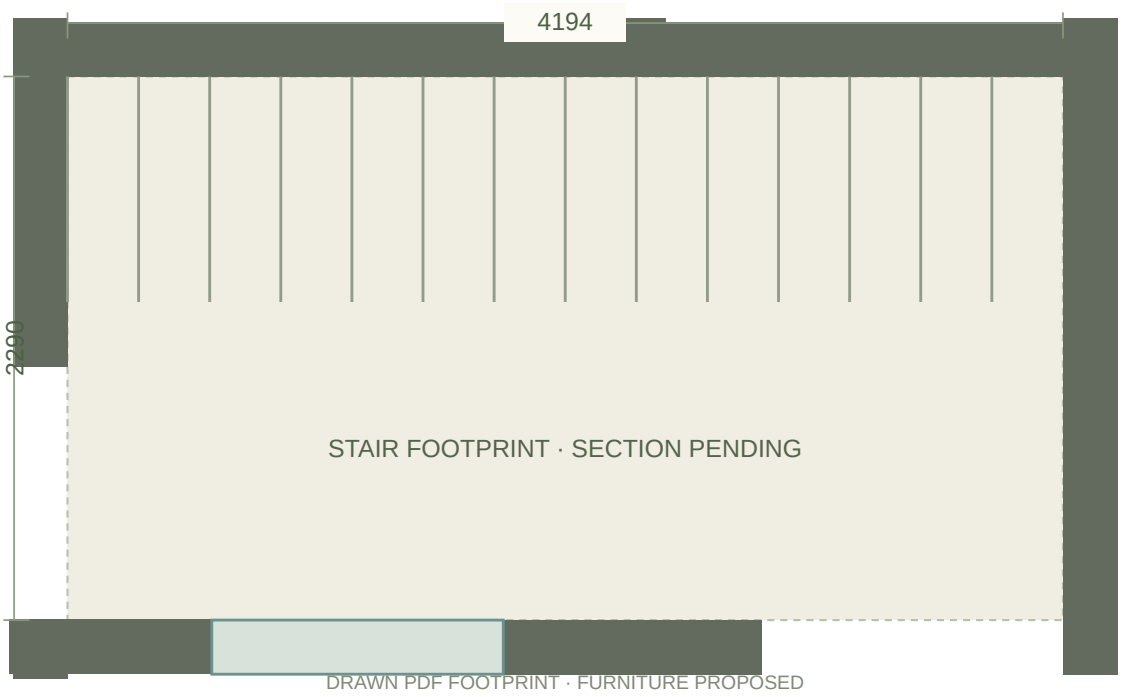

Layout & finishes

Pale stone treads, contrasting nosings and a simple metal handrail.

- The PDF stair footprint is retained. The model leaves the flight as a plan outline because floor height and risers are not supplied.
- Provide a continuous handrail, slip-resistant treads and low-level lighting after the architect fixes the stair section.
- Future upper floor stays in the brief; no new outdoor staircase or entrance is added.

Light & services

Low-level step lighting and two-way switching.

Foundation/plinth designed by an engineer for a future floor, as confirmed by user. Coordinate the existing structural drawings, stair geometry, headroom, future entry and service risers before continuing construction.

Finish codes: P01 · P02 · F01 · J01

The material schedule

Code / material	Application	Specification to approve
P01 / Warm ivory	Main interior walls	Low-sheen washable paint; approve an actual sample on a dry, prepared wall.
P02 / Chalk white	Ceilings	Matt ceiling finish. Plain ceiling is the default; no invented beam concealment.
F01 / Soft stone	Dry-area floors	Matte porcelain proposal. Select slip performance, module and grout from samples; no quantity until the shell is checked.
F02 / Wet-area stone	Bathroom floor	Wet slip performance and drain slopes to be specified as a system. Colour alone does not establish safety.
J01 / Pale oak	Dry joinery	Oak-tone laminate or veneer proposal. Confirm core grade, emissions, edges, hardware and warranty.
J02 / Ivory wet-zone joinery	Kitchen + vanity	Moisture-appropriate documented board grade, sealed cuts, raised or protected base and service access. Approve supplier specification.
S01 / Light mineral surface	Counter + altar	Light stone family; choose the actual surface after stain, heat and cleaning demonstrations. No brand or performance assumed.
T01 / Oatmeal textile	Sofas + headboards	Removable washable or documented easy-clean upholstery, tested on a physical sample.
T02 / Muted sage	Limited textile accents	Small accents keep the palette light. Match in daylight and under the selected lamps.
M01 / Brushed metal	Fittings + mirror details	Consistent finish with documented wet-area suitability where needed.
C01 / Soft white	Appliances + sanitaryware	Appliance and fixture sizes remain product reservations, not endorsed selections.

Lighting intent

Code / purpose	Temperature	Before sign-off
L01 / Soft general light	3000 K	Point locations proposed; output and count need calculation
L02 / Dining pendant	3000 K	Height and glare to be checked with table and users
L03 / Clear task / storage light	3500–4000 K	CRI 90+ proposed for mirror and colour-critical tasks
L04 / Desk / counter task light	4000 K	Avoid glare and shadows; no lux performance claim
L05 / Altar accent	2700–3000 K	Keep fixtures clear of heat and flame
L06 / Low night light	2700 K	Trial brightness; avoid direct view from beds
L07 / Wet-area light	4000 K	Installer to select zone-appropriate ingress protection

The cost & decision plan

Indicative interior allowance: ₹16.96 lakh – ₹29.79 lakh, including 15% contingency. All purchases are new. These are unquoted planning allowances, not a supplier offer.

Category	Planning range	Basis
Floor finishes & skirting	₹1.50 lakh–₹2.50 lakh	Measured tiled area, substrate and labour
Painting & surface preparation	₹0.70 lakh–₹1.30 lakh	Wall/ceiling areas, product and number of coats
Kitchen cabinets, worktop & sink	₹2.00 lakh–₹3.50 lakh	Final cabinet lengths and hardware
Wardrobe, vanity & storage	₹1.40 lakh–₹2.50 lakh	One-sided dressing storage and utility shelves
Beds, mattresses, seating & dining	₹2.20 lakh–₹3.80 lakh	All new: two beds and mattresses, two sofas, six-seat dining, study furniture and compact bedside storage; exact products pending
Electrical fit-out, fans & lights	₹1.50 lakh–₹2.60 lakh	Point schedule, DB, protection and wiring
Bathroom & plumbing fit-out	₹1.40 lakh–₹2.50 lakh	Fixtures, geyser, waterproofing and service labour
Appliances & cooling	₹2.20 lakh–₹3.70 lakh	All new: fridge, separate built-in three-burner gas hob and single-zone induction unit, extractor, washing machine, TV and TWO bedroom AC units. Unquoted planning allowance; selected products, ductwork, installation and capacities may change it. No reuse credit.
Curtains & soft furnishings	₹0.60 lakh–₹1.10 lakh	Measured windows, fabrics and tracks
Interior doors & hardware	₹1.00 lakh–₹1.80 lakh	Final opening count and sizes
Two baby cots & safe mattresses	₹0.25 lakh–₹0.60 lakh	Two new compliant cots and compatible infant mattresses; exact product dimensions pending, not fabricated from the model

Shell construction, roof, structural work, exterior openings, design fees and statutory approvals are excluded. Obtain a separate civil BOQ; only the plinth exists.

Before design sign-off

- Resolve the store, study and living-room label-versus-drawing discrepancies with the architect.
- Confirm parent-bed width and exact outer sizes of both cots; approve a safe arrangement with both access routes clear.
- Choose actual three-burner gas and single-zone induction models (both fixed), extractor, fridge size, oven/microwave needs and washing-machine location.
- Confirm how clothing and linen storage will be split between the two families.
- Confirm ceiling, window sill/head and door details from architectural elevations; no heights are supplied in this PDF.
- Obtain itemised Jammu quotations, including labour, taxes, delivery, installation and warranty.

Original source SHA-256:
2c22e21673e9bd704036734eb310a27f706488516e390dbe4e8248f21b1d5fd3

Furniture CSV, full room sheets and research sources: Open the review website.